



PRODUCT CATALOG 2025

Published on:
February 2025



847-455-4269



WWW.GREENMILELS.COM



INFO@GREENMILELS.COM



Building's Life Coach™ Philosophy

Guided by the philosophy of a "Building's Life Coach," our strategic vision aims to markedly extend the building's lifespan through annual, incremental building upgrades. This tailored approach involves tapping into diverse resources—utility incentives, federal and state support, allocated budgets, and savings accrued from preceding years. The incorporation of energy-efficient technologies, fueled by utility incentives, not only curtails operational costs but also aligns the building with sustainable practices, minimizing its environmental impact.

Strategic and periodic investment towards sustainable facility management ensures the building remains technologically advanced and adaptable, ready to meet emerging needs and evolving standards. In essence, this comprehensive strategy, guided by the ethos of a "Building's Life Coach," not only guarantees the ongoing relevance and efficiency of the structure but also fosters resilience, longevity, and a positive impact on its surroundings.

We are best at training our channel partners to consistently deliver value-added energy conservation measures (ECM) and solutions to their clients. We have a proven process to help you find new customers by virtue of servicing your existing customers.

Core Values

ADAPT - NO EXCUSE:

Resilient, proactive mindset; embracing change without excuses.

OVER AND ABOVE:

Exceeding expectations, going beyond, delivering exceptional performance.

TEACH ME MORE:

Continuous learning, open-mindedness, embracing knowledge, and growth.

STRONGER UNITED:

Unity, collaboration, and resilience for collective strength and growth.

Core Focus™

Our Purpose, Cause, and Passion

Helping people create "A-Ha" moments

Our Niche

Providing Energy Solutions

10 Year Target™

Our goal is to provide Energy Efficiency for 250,000 buildings/properties by 2030



Maverick Energy Solutions (MES) is on a mission to lead the way in shaping a cleaner and more sustainable future. Committed to innovation, integrity, and environmental stewardship, MES specializes in manufacturing cutting-edge commercial lighting, advanced controls, electric vehicle chargers, and other sustainable products.

Our mission is to provide consultative expertise, optimize financial incentives, ensure pricing and availability excellence, and embrace a proactive 'Get Things Done' mentality. Through these principles, MES is dedicated to illuminating the path to a greener world, one project at a time.

Join us as we strive to empower businesses and communities with sustainable solutions that make a lasting impact on our planet.



TABLE OF CONTENTS

<u>What's New</u>	<u>Pg. 03</u>
<u>Indoor Retrofits</u>	<u>Pg. 07</u>
<u>Outdoor Retrofits</u>	<u>Pg. 17</u>
<u>Indoor Fixtures</u>	<u>Pg. 21</u>
<u>High Bay Fixtures</u>	<u>Pg. 25</u>
<u>Outdoor Fixtures</u>	<u>Pg. 32</u>
<u>Tenons & Mounts</u>	<u>Pg. 51</u>
<u>Emergency Drivers</u>	<u>Pg. 55</u>
<u>Stand Alone Controls</u>	<u>Pg. 59</u>
<u>Network Lighting Controls</u>	<u>Pg. 61</u>
<u>Refrigeration</u>	<u>Pg. 65</u>
<u>Energy Efficient Products</u>	<u>Pg. 67</u>
<u>EV Chargers Catalog</u>	



New and Notable Products

GLOSSARY

Look for the following features on our line of products:



Selectable Wattage

Products with the Selectable Wattage icon offer users the ability to quickly decrease or increase the LED wattage.



High Lumen

These products emit brighter light, making them ideal for large indoor and outdoor spaces where a lot of light is required.



ZSR Sensor Ready Technology

MES products with the Sensor Ready icon come with designated receptacles allowing quick and convenient sensor plug in.



Photocell

Fixtures with built-in Photocell



MES Standard 7-Year Product Warranty

MES fixtures come standard with a best-in-class 7-year warranty.



Lite LinQ

An intelligent network of individually addressable lights and control devices that allows each device to send and receive data.



Correlated Color Temp (CCT) Tunable

MES products with the CCT Tunable icon have the ability to deliver varying light color from 3000K to 5000K.



Sensor Ready

MES products with the Sensor Ready icon come with designated receptacles allowing quick and convenient sensor plug in.



Sensor Ready

MES products with the Sensor Ready icon come with designated receptacles allowing quick and convenient sensor plug in.



Dark Sky Compliant

The fixture light beam is angled down to prevent light trespass



MES Optional 10-Year Product Warranty

MES offers an optional 10-year warranty for products and labor.



SkyFi Blu Pro

No gateway or Internet is needed. Safe and easy installation. Wireless Bluetooth mesh connection. Area/Group control & linking

CERTIFICATIONS



For more than 100 years, Underwriters Laboratories has been a non-profit organization dedicated to public safety. UL sets standards for different product categories and tests products to make sure they meet the standards.

The ETL Mark is proof of product compliance to North American safety standards. Authorities Having Jurisdiction (AHJs) and code officials across the US and Canada accept



DesignLights Consortium ®

The DesignLights Consortium (DLC) is a non-profit organization promoting high-quality, energy-efficient lighting products in collaboration w/ utilities and energy-efficiency program members, manufacturers, lighting designers, and federal, state and local entities.



Gladiola Series

LED Tubes

- UL & DLC listed.
- High lumen LEDs.
- IP20 LED Waterproof Luminance
- 10 Years Warranty.



Pine SSR+ LED Linear High Bay

- Wattage Selectable
- Dimmable
- ZSR Ready for NLC controls
- 10 KV Surge Protection
- 155 LM/W



Hazel GSR LED Vapor Tight High Bay

- Wattage Selectable
- CCT Tunable
- Dimmable
- IP67 LED Waterproof Luminance
- NEMA-4X & IK10 Rated
- NSF Certifications
- 140 LM/W



Cougar SSR LED Street Light

- Wattage Selectable
- Dimmable
- Built in Photocell
- Prismatic polycarbonate lens
- Can be mounted directly to a wall, pole, or to a new or existing mounting arm



Jasmine GSR LED Soffit Canopy Retrofit

- Wattage Selectable
- CCT Tunable
- Dimmable
- Sensor Ready for NLC controls
- Capable of retrofitting any soffit or canopy.
- Rated for Damp / Dry Locations




Leopard G LED Post Top

- Wattage Selectable
- CCT Tunable
- Dimmable
- Photocell Ready
- Convert into Area Light
- 155 LM/W



Helios LED Emergency Driver

- Constant power output upto 40W.
- Protection: over-voltage, short-circuit, over-load, open-circuit.
- Comply with UL924 standard and CSA 22.2, No. 141 for USA and Canada.
- Emergency duration is 1.5 hours.

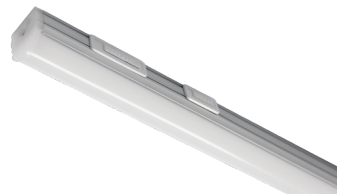

Rose G

LED Linear Integrated Fixture

- Wattage Selectable
- CCT Tunable
- Dimmable
- IP20 Rated
- Rated for Damp / Dry Locations
- 150 LM/W



Pine GSR LED Linear High Bay

- Wattage Selectable
- CCT Tunable
- Dimmable
- Sensor Ready for NLC controls
- 145 LM/W



Hercules GSR LED Canopy Fixtures

- Wattage Selectable
- CCT Tunable
- Dimmable
- IP65
- Knock outs on all the four sides.
- Can be Washed Down.



Coyote SSR LED Sports Light

- Wattage Selectable
- Dimmable
- ZSR Ready for NLC controls
- 20 KV Surge Protection
- Remote Driver
- 155 LM/W



Bobcat LED Soffit Canopy Fixture

- Wattage Selectable
- CCT Tunable
- Dimmable
- Sensor Ready for NLC controls
- Available Bronze & White



Giraffe G LED Bollard Light

- Wattage Selectable
- CCT Tunable
- Dimmable
- Available in Bronze & White
- Available in Round & Square



LED TUBES (GLADIOLA SERIES)

Description:

LED Type A, B, A+B tubes are ideal for customers with older fluorescent ballasts who want to maximize efficiency with high system efficacy. It is Environmentally Friendly, No Mercury Inside

- Type A = Direct Replacement
- Type B = Dual End Bypass
- Type A+ B = Dual Mode

Features:

- Frosted glass; eliminates pixelation.
- Instant startup.
- Suitable for retail, school, healthcare, and other various commercial applications.




Order Code	DLC Product ID	Tube Type			Size	Watts	CCT	LM/Watts	Total LM	Voltage	Color
09230	PQLGVYFU	T8	Type B	Dual End Bypass	2FT	6W	4000K	180 LM/W	1,080 LM	120-277V	White
09231	PRPF5H8T				2FT	6W	5000K		1,080 LM		
09232	POSNMKKG				4FT	9W	4000K		1,650 LM		
09233	P9IT03CA				4FT	9W	5000K		1,650 LM		
09234	PRW779OB		Type A+B	Dual Mode	4FT	9W	5000K		1,650 LM		
09235	PXPQDJHL				4FT	9W	4000K		1,650 LM		

Order Code	DLC Product ID	Tube Type			Size	Watts	CCT	LM/Watts	Total LM	Voltage	Color	
02093	P43OQK9E	T8	Type B	Dual End Bypass	4FT	13.5W	4000K	130LM/W-150 LM/W	1,800 LM	120-277V	White	
02094	PTLIVQRW					13.5W	5000K					
02092	S-5G4LXY					15W	5000K		2,100 LM			
02096	S-X64T81					17W	4000K		2,200 LM			
02097	S-VVXQHQ					17W	5000K		2,200 LM			
02099	S-GQKHYF					24W	4000K		3,200 LM			
02112	S-8G0NL6					24W	5000K		3,200 LM			
02095	S-8MWDK0					13.5W			1,800 LM			
02098	S-9LJXBQ					17W	3500K 4000K		2,200 LM			
02113	S-L01BB1	T5	Type B	Dual End Bypass	4FT	15W	5000K	130LM/W-150 LM/W	2,100 LM	120-277V	White	
02114	S-Z73M1T					24W	6500K		3,200 LM			
02057	S-NK5YVZ	T8-U	Type A+ B	Dual Mode		15W			2,100 LM			
02081	S-I6BS9E					15W	4000K		2,100 LM			
02082	S-BIQ420					15W	5000K		2,100 LM			

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS

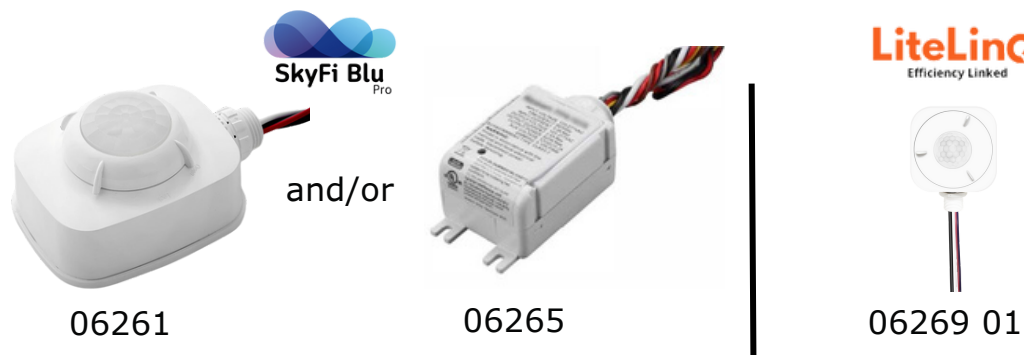

LED TYPE C TUBES RETROFIT (ORCHID SSR)

Description

Our External Drive LED Type C tubes are ideal for customers with older fluorescent ballasts who want to maximize efficiency, but don't want to install Type B linear voltage retrofit lamps. LED's system can be integrated with robust dimming and control functionality. It Offers high system efficacy, the greatest overall performance.

Features:

- Frosted glass; eliminates pixelation.
- Instant startup.
- Suitable for retail, school, healthcare, and other various commercial applications.



Order Code	DLC Product ID	Size	Number of Tubes	Watts	CCT	LM/Watts	Total LM	Voltage	Color
13937	S-MFNTL0	2 FT	1 Tube	6W	4000K	180 LM/W	1,080 LM	120-277V	White
13938	S-S3CKZY		1 Tube	6W	5000K		1,080 LM		
13941	S-J589CB		2 Tube	12W	4000K		2,160LM		
13942	S-NK10HL		2 Tube	12W	5000K		2,160 LM		
13945	S-W52XNM		3 Tube	18W	4000K		3,240 LM		
13946	S-93XWMC		3 Tube	18W	5000K		3,240 LM		
13949	S-L4MV9L	4 FT	1 Tube	9W	4000K	180 LM/W	1,620 LM		
13950	S-4BYLYC		1 Tube	9W	5000K		1,620 LM		
13965	PYYFLQ67		1 Tube	13W	4000K	140 LM/W	1,820 LM		
13966	PHJ0BOQR		1 Tube	13W	5000K		1,820 LM		
13967	PS4JC44S		1 Tube	15W	4000K	180 LM/W	2,100 LM		
13968	PBTMYMBR		1 Tube	15W	5000K		2,100 LM		
13953	S-6KM8MH		2 Tube	18W	4000K	140 LM/W	3,640 LM		
13954	S-5GMYH4		2 Tube	18W	5000K		3,640 LM		
13969	PYETK1LT		2 Tube	26W	4000K	180 LM/W	4,860 LM		
13970	PYSTXTFF		2 Tube	26W	5000K		4,860 LM		
13971	P0HF1TTU		2 Tube	30W	4000K	140 LM/W	5,460 LM		
13972	PRJZO8M7		2 Tube	30W	5000K		5,460 LM		
13957	S-ZJFYSL		3 Tube	27W	4000K	180 LM/W	6,300 LM		
13958	S-5H54F8		3 Tube	27W	5000K		6,300 LM		
13985	S-KJ7SPP		3 Tube	39W	4000K	140 LM/W	8,400 LM		
13986	S-WN5XTL		3 Tube	39W	5000K		8,400 LM		
13989	S-KD5Z8H		3 Tube	45W	4000K	180 LM/W	10,800 LM		
13990	S-BZB4ML		3 Tube	45W	5000K		10,800 LM		
13961	S-VWWY2W		4 Tube	36W	4000K	140 LM/W	14,400 LM		
13962	S-2NGX5W		4 Tube	36W	5000K		14,400 LM		
13973	PBRBGST0		4 Tube	52W	4000K	180 LM/W	7,280 LM		
13974	PYMBJQKN		4 Tube	52W	5000K		7,280 LM		
13975	PW5C7PIQ		4 Tube	60W	4000K		8,400 LM		
13976	PXGCBLLP		4 Tube	60W	5000K		8,400 LM		

STAND ALONE CONTROLS



ACCESSORIES




NETWORK LIGHTING CONTROLS





LED MAGNETIC STRIP RETROFIT (IRIS SSR)
Description:
The Magnetic Strip Retro series is a family of LED Magnetic retrofit kits, which are used to update existing 2x2 and 2x4 fluorescent luminaires to LED. This family of retrofit also simplifies installation: simply replace your fluorescent tubes with the Magnetic Strips and the fixture’s ballast with the included high-performance LED driver.
Features:

- Can be used to update virtually any existing commercial lighting fixtures to LED.
- Kits include LED strips, an external driver, wire connector, and attached magnets for a quick install.



Order Code (No Lens)	Order Code (Frosted)	DLC Model #	Wattage	Strip Count	CCT	LM/Watt	Total LM	Voltage
----------------------	----------------------	-------------	---------	-------------	-----	---------	----------	---------

2’ Magnetic Strips

10081	10237	S-09P746	15W	1 Strip	3000K	160 LM/W	3,200 LM	120 - 277V
10082	10238	S-1US02O	15W	1 Strip	4000K		3,200 LM	
10083	10239	S-2PB8DJ	15W	1 Strip	5000K		3,200 LM	
10093	10249	S-Q5LCIP	30W	2 Strip	3000K		4,800 LM	
10094	10250	S-43AZ92	30W	2 Strip	4000K		4,800 LM	
10095	10251	S-QJKOAD	30W	2 Strip	5000K		4,800 LM	
10096	10252	S-47P8N9	30W	3 Strip	3000K		4,800 LM	
10097	10253	S-4M9P8K	30W	3 Strip	4000K		4,800 LM	
10098	10254	S-54CET8	30W	3 Strip	5000K		4,800 LM	
10099	10255	S-ZBMF8S	40W	3 Strip	3000K		6,400 LM	
10100	10256	S-0HE4GS	40W	3 Strip	4000K	160 LM/W	6,400 LM	120 - 277V
10101	10257	S-FLSI09	40W	3 Strip	5000K		6,400 LM	

4’ Magnetic Strips

10108	10264	S-8EM4FL	15W	1 Strip	3500K	160 LM/W	2,400 LM	120 - 277V
10109	10265	S-8FR9VZ	15W	1 Strip	4000K		2,400 LM	
10110	10266	S-AGJ04M	15W	1 Strip	5000K		2,400 LM	
10111	10267	S-OMEHZ8	24W	1 Strip	3500K		3,840 LM	
10112	10268	S-D61GE4	24W	1 Strip	4000K		3,840 LM	
10113	10269	S-E8CVL6	24W	1 Strip	5000K		3,840 LM	
10132	10288	S-8EM4FL	15W	2 Strip	3500K		2,400 LM	
10133	10289	S-8FR9VZ	15W	2 Strip	4000K		2,400 LM	
10134	10290	S-AGJ04M	15W	2 Strip	5000K		2,400 LM	
10117	10273	S-OMEHZ8	24W	2 Strip	3500K		3,840 LM	
10118	10274	S-D61GE4	24W	2 Strip	4000K	160 LM/W	3,840 LM	120 - 277V
10119	10275	S-E8CVL6	24W	2 Strip	5000K		3,840 LM	
10120	10276	S-SHN43W	30W	2 Strip	3500K		4,800 LM	
10121	10277	S-LQRCZK	30W	2 Strip	4000K		4,800 LM	
10122	10278	S-0EX8K4	30W	2 Strip	5000K		4,800 LM	
10123	10279	S-64EB50	40W	2 Strip	3500K		6,400 LM	
10124	10280	S-2K7U8X	40W	2 Strip	4000K		6,400 LM	
10125	10281	S-H3IV75	40W	2 Strip	5000K		6,400 LM	
10138	10294	S-F6Y7TB	45W	3 Strip	3500K		7,200 LM	
10139	10295	S-J60LG1	45W	3 Strip	4000K		7,200 LM	
10140	10296	S-AXVZ8B	45W	3 Strip	5000K	160 LM/W	7,200 LM	120 - 277V
10141	10297	S-ZXLS40	60W	3 Strip	3500K		9,600 LM	
10142	10298	S-YL8KT5	60W	3 Strip	4000K		9,600 LM	
10143	10299	S-4I15OZ	60W	3 Strip	5000K		9,600 LM	

Continued...

Order Code (No Lens)	Order Code (Frosted)	DLC Model #	Wattage	Strip Count	CCT	LM/Watt	Total LM	Voltage
----------------------	----------------------	-------------	---------	-------------	-----	---------	----------	---------

4’ Magnetic Strips

10150	10306	S-UZW035	60W	4 Strip	3500K	160 LM/W	9,600 LM	120 - 277V
10151	10307	S-XDUKZO	60W	4 Strip	4000K		9,600 LM	
10152	10308	S-XY04LG	60W	4 Strip	5000K		9,600 LM	
10153	10309	S-GF4VX2	80W	4 Strip	3500K		12,800 LM	
10154	10310	S-NMAFHK	80W	4 Strip	4000K		12,800 LM	
10155	10311	S-ZKLP53	80W	4 Strip	5000K		12,800 LM	
10126	10282	S-UZW035	60W	2 Strip	3500K		9,600 LM	
10127	10283	S-XDUKZO	60W	2 Strip	4000K		9,600 LM	
10128	10284	S-XY04LG	60W	2 Strip	5000K		9,600 LM	
10129	10285	S-GF4VX2	80W	2 Strip	3500K		12,800 LM	
10130	10286	S-NMAFHK	80W	2 Strip	4000K	160 LM/W	12,800 LM	120 - 277V
10131	10287	S-ZKLP53	80W	2 Strip	5000K		12,800 LM	

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS



Before: Fluorescent tubes



After: LED upgrade




LED DOWNLIGHT (WILLOW SERIES)

Description:

Our LED commercial downlights are wattage selectable, CCT tunable, and can be programmed with a toggle switch, allowing the ability to choose multiple color temperatures for any setting. Designed to meet most recessed downlighting application needs. This downlight offers a quiet & and flicker-free LED technology. Available in 0-10V dimming

Features:

- Available in 4", 6", 8", and 10"
- Selectable wattage and color temperatures Internal flicker free driver.
- Goof Rings are Available

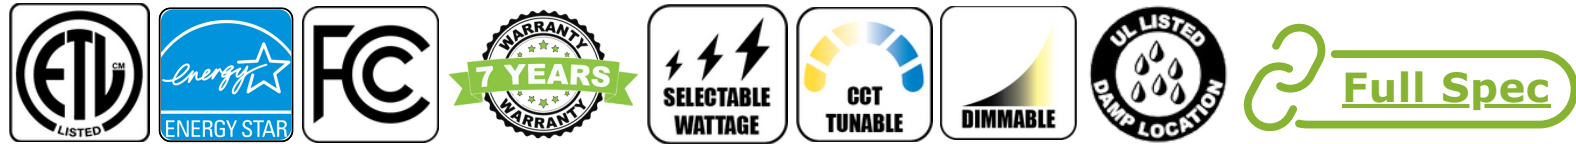



Order Code	Product #	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02943	MES-DL254-10-33W-OAC3A	10"	22W 28W 33W	3000K 3500K 5000K	106 LM/W	2,332 LM 2,968 LM 3,498 LM	120-277V	White
02944	MES-DL254-10-33W-OAC3B	10"	22W 28W 33W	3000K 4000K 5000K		2,332 LM 2,968 LM 3,498 LM		

Order Code	Product #	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02938 - 01	MES-DL254-4-12W-OAC3B	4"	6W 8W 10W 12W 16W	2700K 3000K 3500K 4000K 5000K	106 LM/W	636 LM 848 LM 1,060 LM 1,272 LM 1,696 LM	120-277V	White
02939 - 01	MES-DL254-6-16W-OAC3B	6"	12W 16W 22W 26W 30W			1,272LM 1,696 LM 2,332 LM 2,756 LM 3,180 LM		
02942 - 01	MES-DL254-8-22W-OAC3B	8"	16W 22W 26W 30W 35W			1,696 LM 2,332 LM 2,756 LM 3,180 LM 3,710 LM		

STAND ALONE CONTROLS



ACCESSORIES

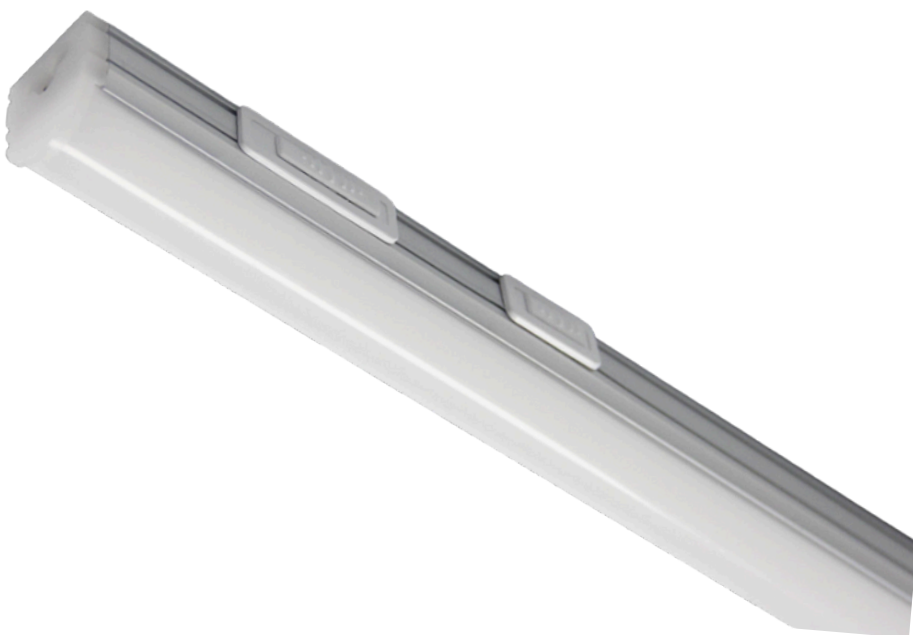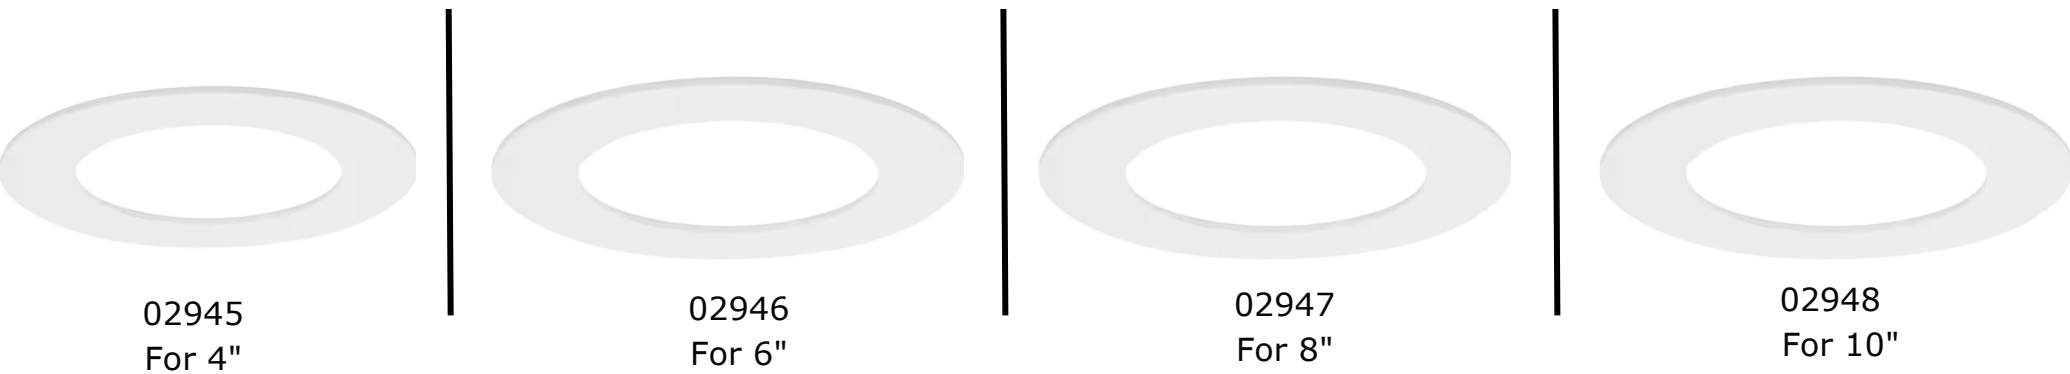

LED LINEAR INTEGRATED FIXTURE (ROSE G)

Description

Discover Maverick Energy Solutions' Rose G LED Linear Fixture - a perfect blend of style and efficiency. This sleek design incorporates cutting-edge LED technology for optimal lighting in any space. Save energy while elevating aesthetics with the Rose G - where form meets function brilliantly. Seamless Linking for Upto 27 fixtures.


Features:

- Can be installed on any surface with clip mount or magnetic clips.
- Optimal lighting for any space.
- Durable build for long-term use.




Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
91006	S-Z57KNE	22W	3500K 4000K	150 LM/W	3300 LM	120-277V	White
	S-9GP98D	30W	5000K 5700K		4782 LM		
	S-110RSS	40W	6500K		5928 LM		

STAND ALONE CONTROLS

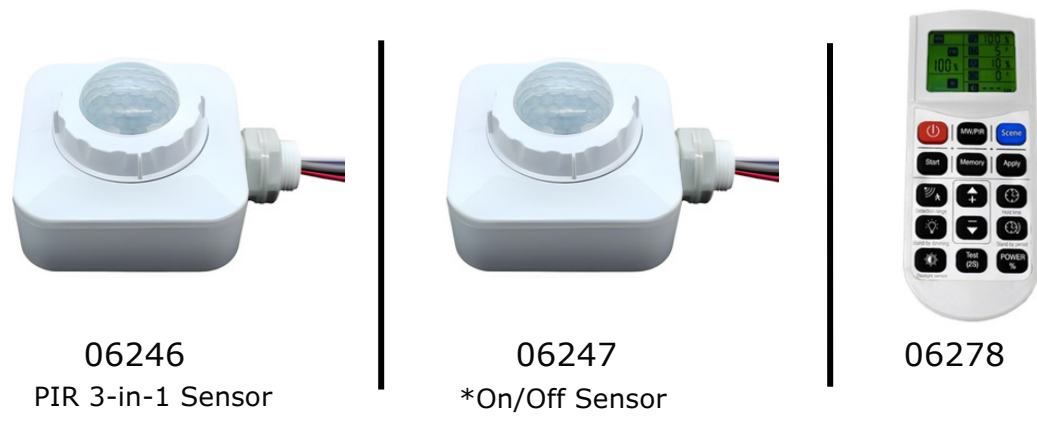

NETWORK LIGHTING CONTROLS

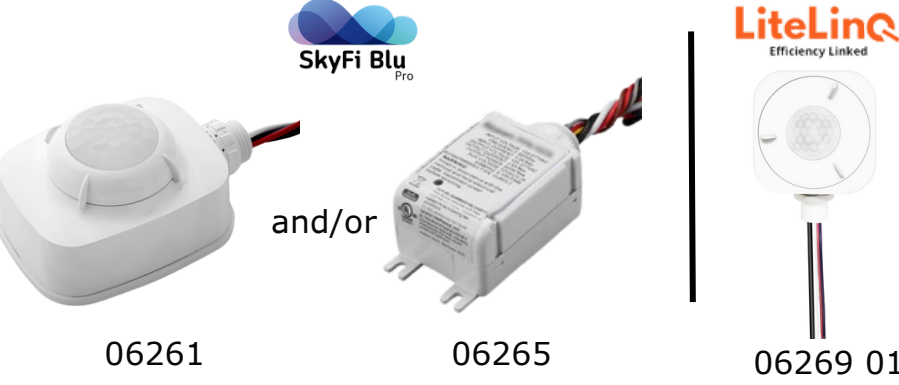



LED STRIP FIXTURE RETROFIT (LILY S & GSR)

Description:


Our Strip Fixture Retrofit (SFR) kit includes everything needed for a seamless quick retrofit of existing 4’ and 8’ fluorescent strips along with other industrial fixtures to LED, in as little as two minute. The SFR includes housing with pre-wired drivers, installation brackets, lenses, and hardware with each retrofit kit.

Features:

- AL+PC with an acrylic lens.
- LED Saves 60-75% of energy over HID and 40-50% over T8/T5HO
- It’s the industry’s fastest LED strip retrofit kit!



Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
04005	S-KC8FRP	8FT	38W 46W 54W	5000K	135 LM/W	5,130 LM 6,210 LM 7,290 LM	120 - 277V	White

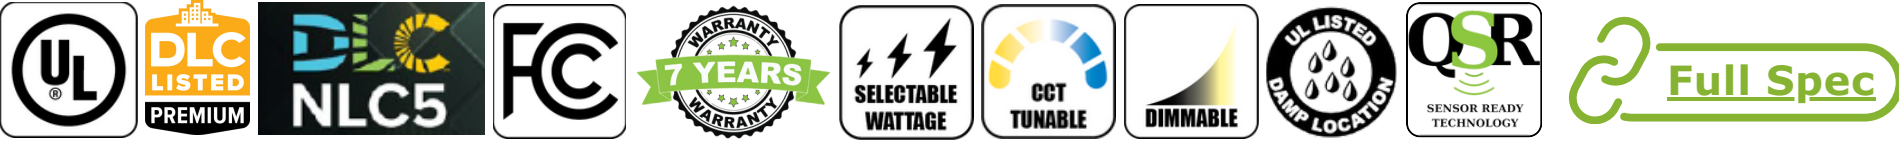


Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
04008 02	S-HKWA9M	4FT	34W 38W 45W	3500K 4000K 5000K	135 LM/W	4,590 LM 5,130 LM 6,075 LM	120 - 277V	White
04010 02	S-G2LU47	8FT	65W 75W 90W	3500K 4000K 5000K		8,775 LM 10,125 LM 12,150 LM		

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS

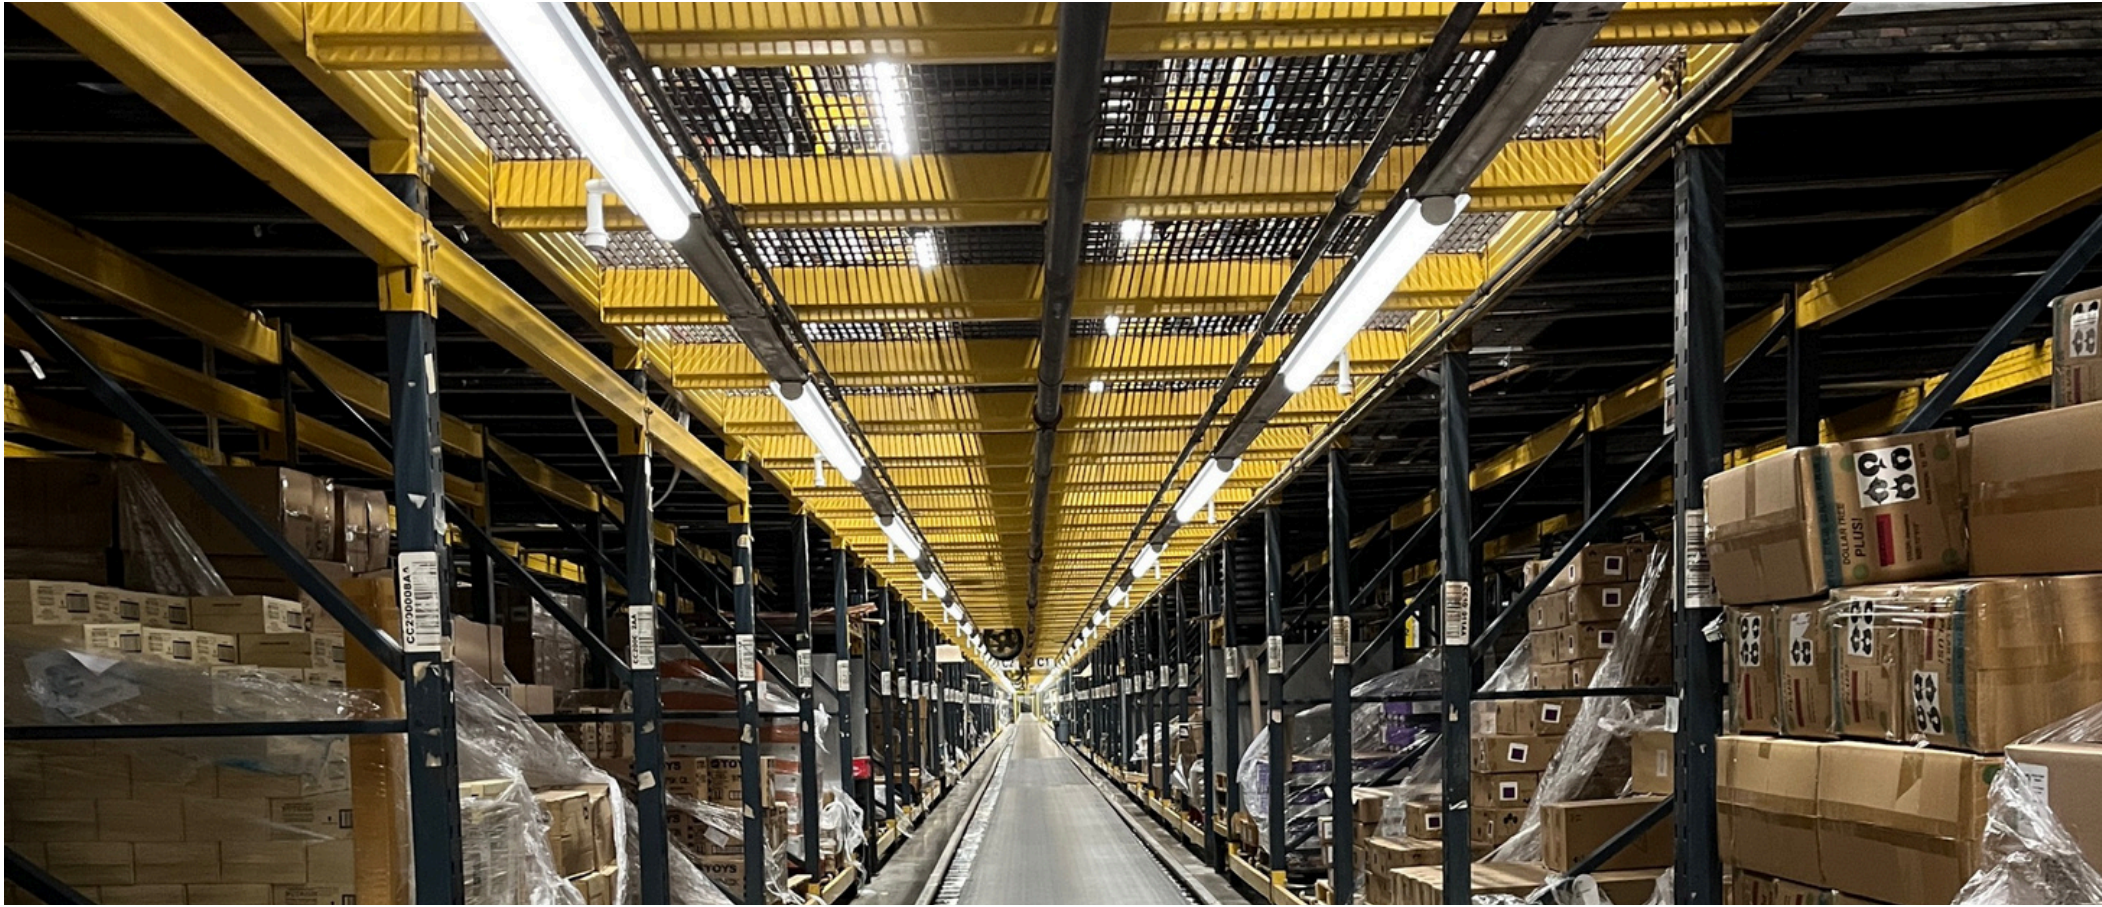


LED VOLUMETRIC TROFFER RETROFIT (LILAC GSR)

Description:

The Slim Line LED retrofit kit for troffers simplifies the conversion from existing fluorescent 2x2 and 2x4 recessed troffer fixtures to energy-efficient LED fixtures using the back housing of the existing fixture. This Troffer Retrofit kit can be retrofitted into most existing troffers in less than 15 minutes.

Features:

- Can be retrofitted into most existing troffers.
- Continuous dimming (0-10V) comes standard.
- Suitable for retail, schools, and other.

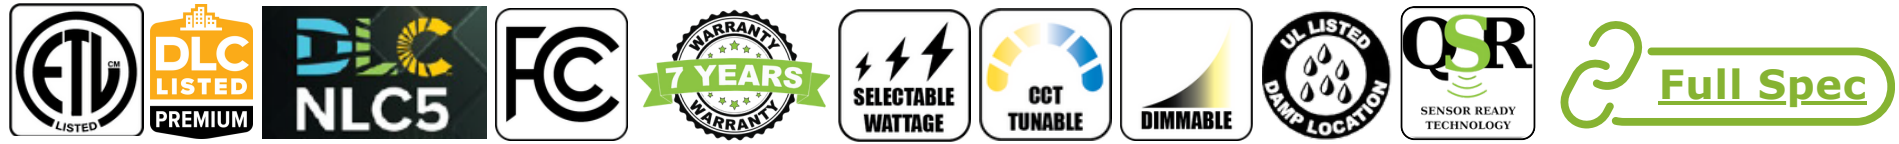

Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
04064	S-YZGL1E	1X4	20W 25W 30W	3500K 4000K 5000K	125 LM/W	2,500 LM 3,125 LM 3,750 LM	120 - 277V	White
04065	S-Z1FVQP	2X2						
04066	S-MZI570	2X4	25W 30W 35W		128 LM/W	3,200 LM 3,840 LM 4,480 LM		
04067	S-V0KHFY	2X4	34W 38W 45W		125 LM/W	4,250 LM 4,750 LM 5,625 LM		

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS





BACK-LIT PANEL RETROFIT (LOTUS GSR)

Description:

This Back-Lit Panel Retrofit, is an innovative lighting solution designed to upgrade existing lighting fixtures. By replacing traditional lighting components with This panels, users can enhance the visual appeal of spaces, improve light distribution, and achieve significant energy savings. It is Recessed ceiling mounting ready

Features:

- Surface mounting with optional accessories
- Patented design to install sensor in the field via quick connect



Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02843	S-RQSSDR	2X2	20W	3500K 4000K 5000K	125 LM/W	2,500 LM	120-277V	White
			25W			3,125 LM		
			30W			3,750 LM		
02845	S-PY5CZJ	2X4	23W			2,875 LM		
			30W			3,750 LM		
			36W			4,500 LM		
02846	S-RSLRFK	2X4	35W			4,375 LM		
			40W			5,000 LM		
			46W			5,750 LM		

STAND ALONE CONTROLS



06267 02



06278

NETWORK LIGHTING CONTROLS



06274



06291



HID OUTDOOR RETROFIT KIT (TULIP B)

Description:

This Outdoor Retrofit Kit is a multi-function retrofit solution for outdoor fixtures. The fixture can be used to retrofit HID wall packs, shoebox area lights and flood lights, canopy lights, and high bays. Simply remove your old bulb, bypass the ballast, and mount the retrofit kit inside your fixture with the included bracket mount and hardware.

Features:

- Have Integral thermal control sensor with external Meanwell driver.
- Gives up to 130 lumens per watt for better energy efficiency.



Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
06012	S-74NG85	35W	5000K	105 LM/W	3,675 LM	120-277V	Sliver
06005	P9017XPI	80W		124 LM/W	9,920 LM		
06013	PU9JP1EVP	100W		127 LM/W	12,700 LM		
06008	R6J65ZR	150W		130 LM/W	19,500 LM		
06009	PO4DZIO0	200W		119 LM/W	23,800 LM		
06010	PSTA2983	240W		126 LM/W	30,240 LM		






LED SOFFIT CANOPY RETROFIT (JASMINE GSR)

Description:

This slim and sleek LED Petroleum Canopy Light is a high performance fixture, capable of retrofitting any soffit or canopy. The 120-degree beam angle is perfect for illuminating large spaces without leaving dark spots. Comes with 12, 15, and 18-inch plates in bronze or white making it versatile for all applications.

Features:

- Capable of retrofitting any soffit or canopy.
- Available sizes 12X12, 15X15, 18X18 and 22X22 inches
- 120-degree beam angle is perfect for illuminating large spaces without leaving dark spots.

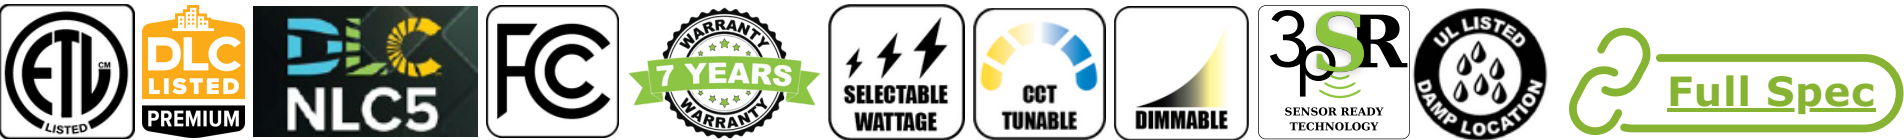

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
06100 01	S-OZAKDL	20W 30W 40W	3000K 4000K 5000K	140 LM/W	2,800 LM 4,200 LM 5,600 LM	120 - 277V	White

PLATES		Order Code	Size	Color
<div>1. Choose fixture</div> <div>2. Select plate size/color needed</div>		06115	12x12	Brown
		06116	15x15	Brown
		06117	18x18	Brown
		06118	12x12	White
		06119	15x15	White
		06120	18x18	White
		06121	22x22	White




LED SOFFIT CANOPY FIXTURE (BOBCAT G)

Description:

Designed to be used in moisture-filled or harsh settings, these fixtures have durable housing that resists warping, fading, corrosion, and rust. The impact-resistant lenses can withstand the weather and are held in place by non-corrosive metal clips. LED vapor-tight fixtures use half the energy of fluorescents, lowering energy costs.

Features:

- Capable of retrofitting any Soffit or Canopy.
- 120-degree beam angle is perfect for illuminating large spaces without leaving dark spots.
- Suitable for damp locations.

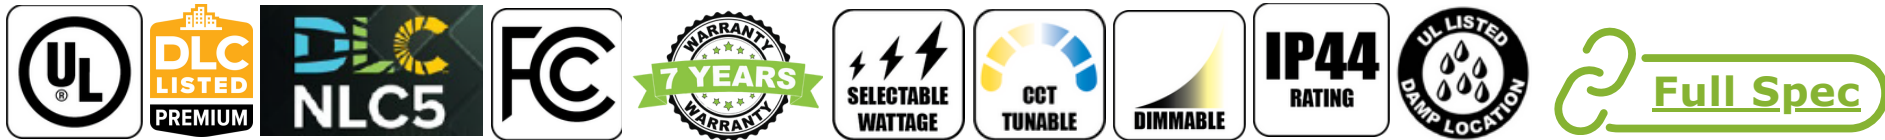


Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
06102	S-MNXDUL	13W 15W 20W	3500K 4000K 5000K	126 LM/W	1,638 LM 1,890 LM 2,520 LM	120-277V	White
06103	S-DQVRCW	36W 45W 55W			4,356 LM 6,655 LM 6,655 LM		
06104	S-MNXDUL	13W 15W 20W			1,638 LM 1,890 LM 2,520 LM		
06105	S-DQVRCW	36W 45W 55W			4,356 LM 6,655 LM 6,655 LM		

NETWORK LIGHTING CONTROLS



STAND ALONE CONTROLS

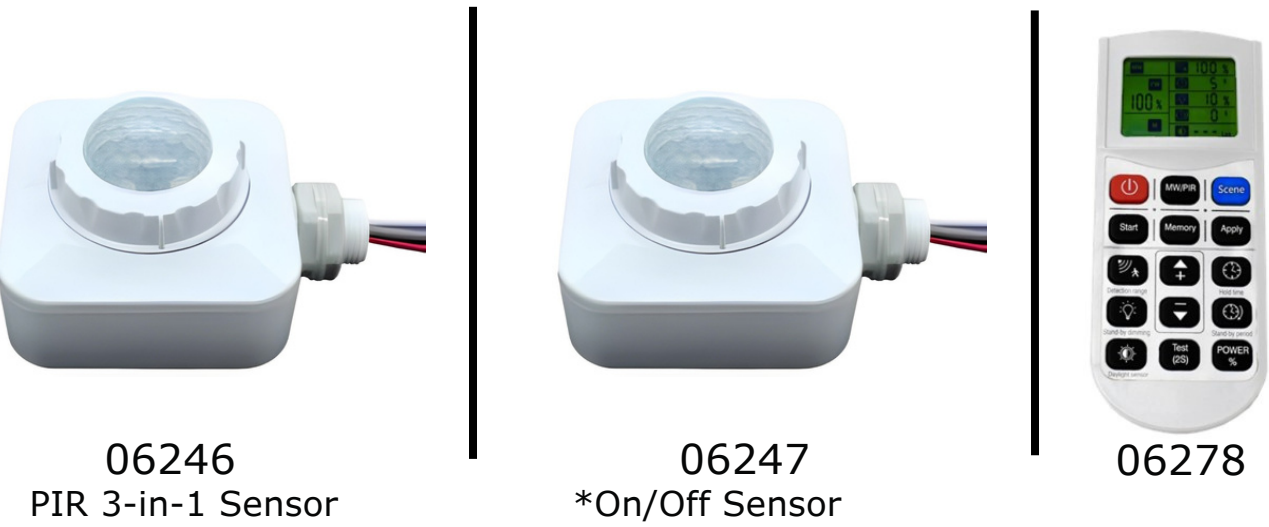

NETWORK LIGHTING CONTROLS





LED VAPOR TIGHT FIXTURE (HAZEL GSR)

Description:

Designed to be used in moisture-filled or harsh settings, these fixtures have a durable housing that resists warping, fading, corrosion, and rust. The impact resistant lenses are able to withstand the weather, and are held in place by non-corrosive metal clips. LED vapor tight fixtures use half the energy of fluorescents, lowering energy cost.

Features:

- Available in 4’ and 8’
- Designed as a direct replacement for fluorescent strips.
- Selectable wattage and patent-pending sensory ready technology available



Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02508	S-TF1SHN	35W 45W 60W	3500K 4000K 5000K	140 LM/W	4,900 LM 6,300 LM 8,400 LM	120 - 277V	White
02509	S-6807H1	55W 65W 75W 90W			7,700 LM 9,100 LM 10,500 LM 12,600 LM		

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS




LED COVERED STRIP FIXTURE (JUNIPER GSR)

Description:

The LED Covered Strip Fixture, available in 4’ and 8’, is designed as a direct replacement for fluorescent strips. This luminaire delivers general ambient lighting in a variety of indoor settings, including schools, offices, hospitals, and stores, and is the perfect choice for both new construction and retrofits.


Features:

- Available in 4’ and 8’
- Designed as a direct replacement for fluorescent strips.
- Selectable wattage and patent-pending sensory ready technology available



Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02381	S-Z3AXC6	4FT	24W 32W 40W	3500K 4000K 5000K	130LM/W	3,120 LM 4,160 LM 5,200 LM	120-277V	White
02382	S-X8Z2FT	8FT	40W 50W 64W			5,200 LM 6,500 LM 8,450 LM		

STAND ALONE CONTROLS

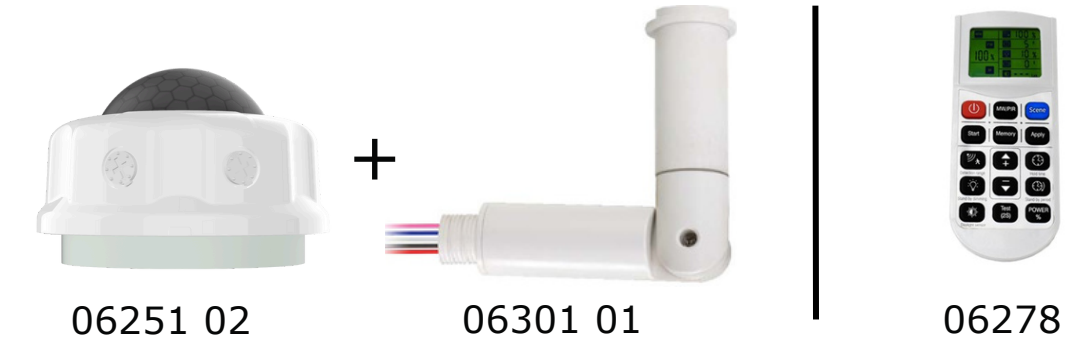


NETWORK LIGHTING CONTROLS






LED VOLUMETRIC TROFFER (REDWOOD GSR+)
Description:
Our Redwood SSR troffer is dimmable, has selectable wattage, and comes sensor-ready. It is dimable and suitable for Damp Locations. Our troffers provide a quick and easy solution for warehouse and other commercial applications. Available in 2’x2’ and 2’x4’ versions. Suitable for retail, schools, offices, healthcare, and other various commercial applications
Features:

- Mountable in an existing troffer fixture
- Durable steel housing with an acrylic lens that is removable for quick cleaning

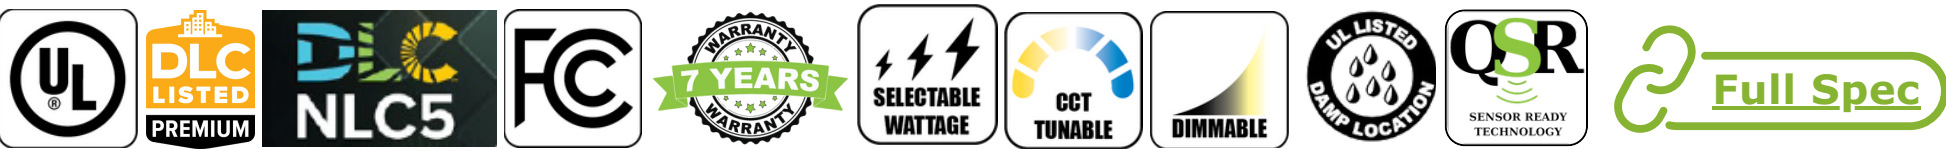


Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02675-02	S-D2VX7R	2X2	15W		131 LM/W	1,965 LM		
			20W			2,620 LM		
			25W			3,275 LM		
			30W			3,930 LM		
			40W			5,240 LM		
02676-02	S-J9QRG7	2X4	23W	3000K	131 LM/W	3,013 LM	120-277V	White
			30W	3500K		3,930 LM		
			35W	4000K		4,585 LM		
			40W	5000K		5,240 LM		
			50W	6500K		6,550 LM		
02676-04	S-R1N2QG	2X4	30W		131 LM/W	3,930 LM		
			40W			5,240 LM		
			50W			6,550 LM		
			60W			7,860 LM		
			72W			9,432 LM		

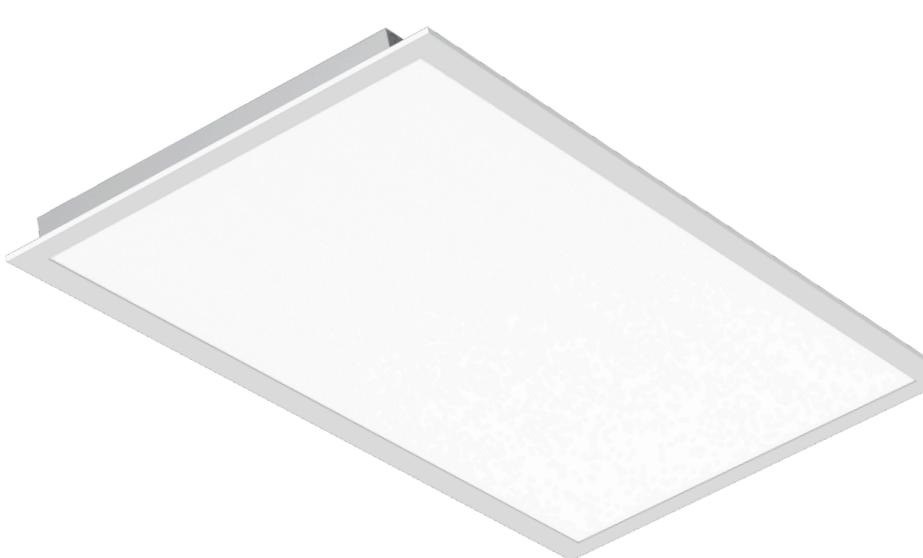

LED BACKLIT THIN PANEL (SPRUCE GSR+)
Description:
Ideal for drop ceilings and easy-to-surface or suspension mount. Direct backlit design provides a smooth and more uniform light distribution than edge-lit panels. Our most common replacement for 2x2 or 2x4 drop ceiling grids is where conventional fluorescent troffers are commonly used. Comes with QSR Ready for easy sensor install in field.
Features:

- High-grade aluminum housing, zinc-coated iron back cover
- Suitable for use with 0 -10V dimmers, sensors, and other control strategies.

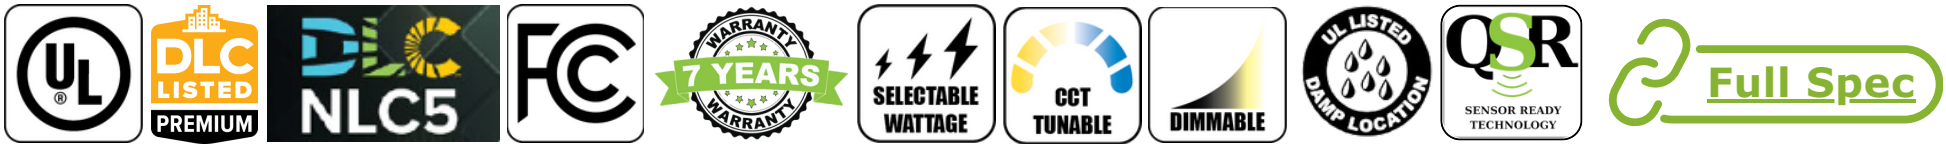

Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02838-02	PLYIUCDY7TUR	1X4	15W		131 LM/W	1,965 LM		
			20W			2,620 LM		
			25W			3,275 LM		
			30W			3,930 LM		
			40W			5,240 LM		
02839-02	S-PAFGX0	2X2	15W	3000K	131 LM/W	1,965 LM		
			20W			2,620 LM		
			25W			3,275 LM		
			30W			3,930 LM		
			40W			5,240 LM		
02841-02	S-KGZ5HN	2X4	23W	5000K	131 LM/W	3,013 LM	120-277V	White
			30W			3,930 LM		
			35W			4,585 LM		
			40W			5,240 LM		
			50W			6,550 LM		
02841-04	S-DNPR2K	2X4	30W		131 LM/W	3,930 LM		
			40W			5,240 LM		
			50W			6,550 LM		
			60W			7,860 LM		
			72W			9,432 LM		

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS



ACCESSORIES



STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS



ACCESSORIES



SMART PRO SERIES

Group control

Auto-Brightness

Dimming

3000-6500K adjustable

Scene Control

NLC5

OTA

Energy monitoring

Schedule

High-end trim

Occupancy Sensing



Order Code	DLC Product ID	Wattage	CCT	Voltage	Function	Color
02673	TPTMTR22CFLB-36WA	36W	3500K 4000K 5000K 6500K	120 - 277V	Bluetooth	White
02674	TPTMTR24CFLB-50WA	50W				



Order Code	DLC Product ID	Wattage	CCT	Voltage	Function	Color
02836	TPTMPD22CFLB-36WA	36W	3500K 4000K 5000K 6500K	120 - 277V	Bluetooth	White
02837	TPTMPD24CFLB-50WA	50W				



LED ARCHITECTURAL LINEAR STRIP LIGHT (ASPEN G)

Description:

This sleek, stylish light features up and down lighting, making this a highly effective lighting solution. This LED direct/indirect suspended linear fixtures can be linked together and are ideal for a variety of applications where continuous linear lighting is desired. It is suitable for suspended mounting and can be used in continuous rows.


Features:

- High-grade aluminum housing, zinc-coated iron back cover
- Suitable for use with 0 -10V dimmers, sensors, and other control strategies.

LED 4ft Architectural Linear Light (Up / Down)

Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
02565	S-A4K532	4FT	30W	3500K	131 LM/W	3,930 LM	120-277V	White
02566	S-TK53QF		40W 50W	4000K 5000K		5,240 LM 6,550 LM		Black



ACCESSORIES

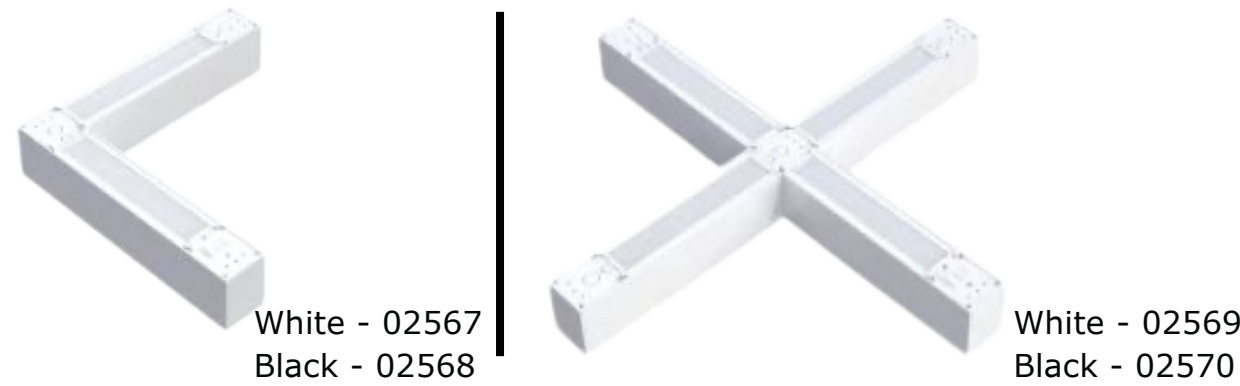

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS

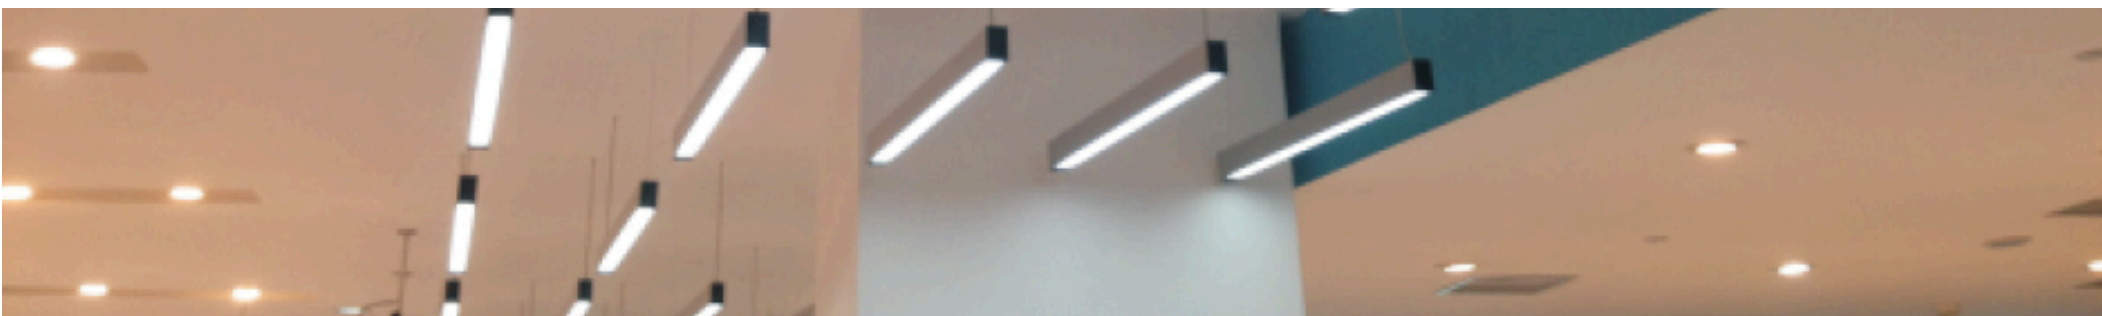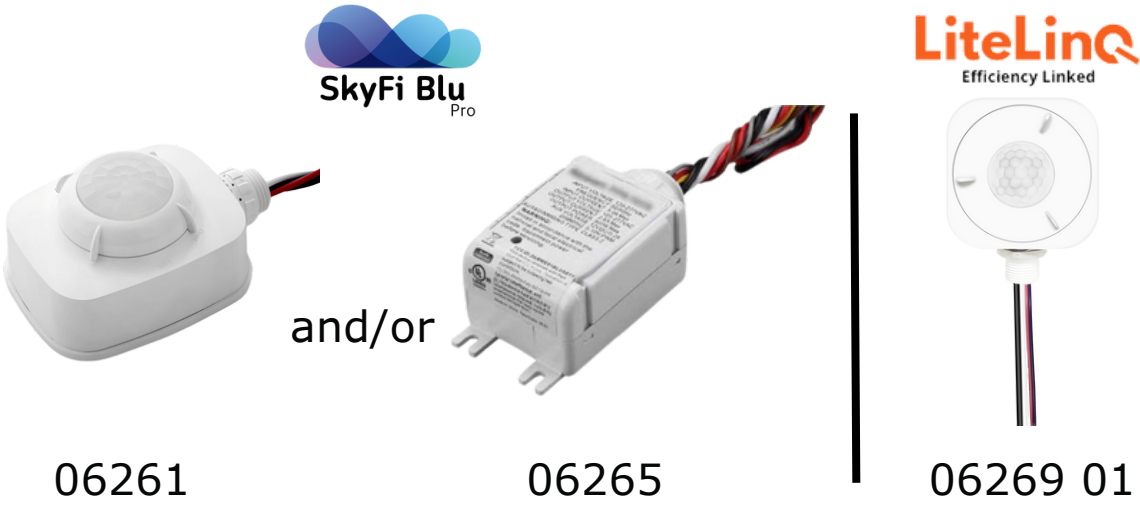



**ZSR
RECEPTACLE**



**PIR
SENSOR**



**REMOTE
CONTROL**



ZSR SENSOR TECHNOLOGY?

It's the easiest way to add controls to illuminate fixtures. Our ZSR sensor ready technology provides an optimal lighting solution in seconds, delivering the quickest and safest route to add a wide array of control devices to your fixture.

INDUSTRY STANDARD

The ZSR receptacle is an industry standard interface for adding low voltage controls to 0-10V dimming fixtures. Look for the ZSR logo and you know your device is sensor ready and easy to control!



CONTROLS DEVICES

The ZSR receptacle works with a wide variety of control devices, including photocontrols, motion sensors, networked lighting controls including other third-party control devices identified as being compatible with ZSR.

Fixtures that include a ZSR interface work with controls that contain 3-in-1 functionality: Occupancy, Bi-Level Dimming, and Daylight Control. ZSR enabled fixtures provide plug-and-play controls functionality right out of the box.




LED ROUND HIGH BAY (ASH GSR+)

Description:

These commercial low-profile high bay fixtures provide a quick and easy solution for warehouse and industrial applications. The low-profile height allows for efficient packaging, as well as accommodates applications where a low hanging fixture is undesirable. These are energy efficient, cost saving alternative to a traditional metal halide lights.

Features:

- Heavy duty cast aluminum with an integrated thermally efficient heatsink profile
- ZSR Ready for NLC Controls
- Comes with 6ft cord

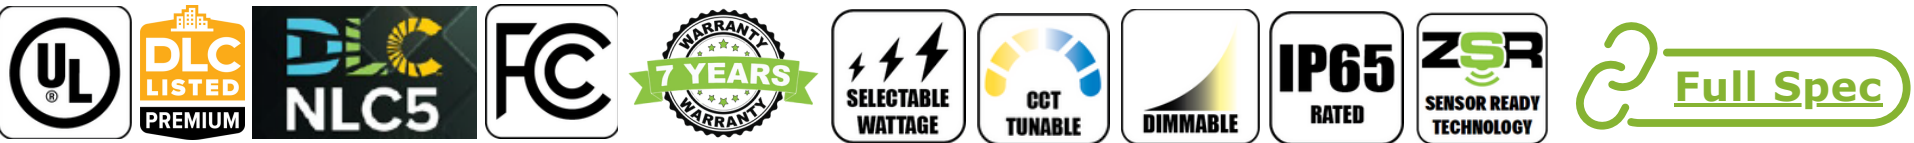

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
03065-02	S-VEMO4W	60W 80W 100W	3500K 4000K 5000K	155 LM/W	09,300 LM 12,400 LM 15,500 LM	120-277V	Black
03066-02	S-BIV8AP	110W 130W 150W			17,050 LM 20,150 LM 23,250 LM		
03068-02	S-KCLWZG	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM		
03080-02	S-GOW9VH	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM	277-480V	

STAND ALONE CONTROLS



06251



06278

NETWORK LIGHTING CONTROLS



06264 01



06270 02



06290 01




LED ROUND HIGH BAY (OAK GSR)

Description:

These sensor-ready LED Round High Bays offer an energy-efficient, cost-effective alternative to traditional metal halide lighting. With a sleek, low-profile design, they provide a fast and convenient solution for warehouses and industrial spaces. Their compact height allows for efficient packaging and is ideal for settings where low-hanging fixtures are not preferred.

Features:

- ZSR Ready for NLC Controls
- 6KV Surge Protection
- Comes with 6ft cord

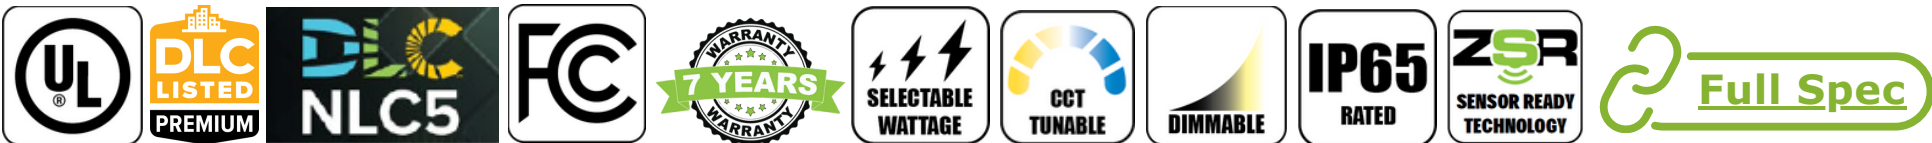

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
03072-02	S-CE3OZT	100W 125W 150W	3500K 4000K 5000K	148 LM/W	14,800 LM 18,500 LM 22,200 LM	120-277V	Black
03076-02	S-2H4JCK	150W 200W 240W			22,200 LM 29,600 LM 35,520 LM		

STAND ALONE CONTROLS



06251



06278

NETWORK LIGHTING CONTROLS




06264 01



06270 02



06290 01

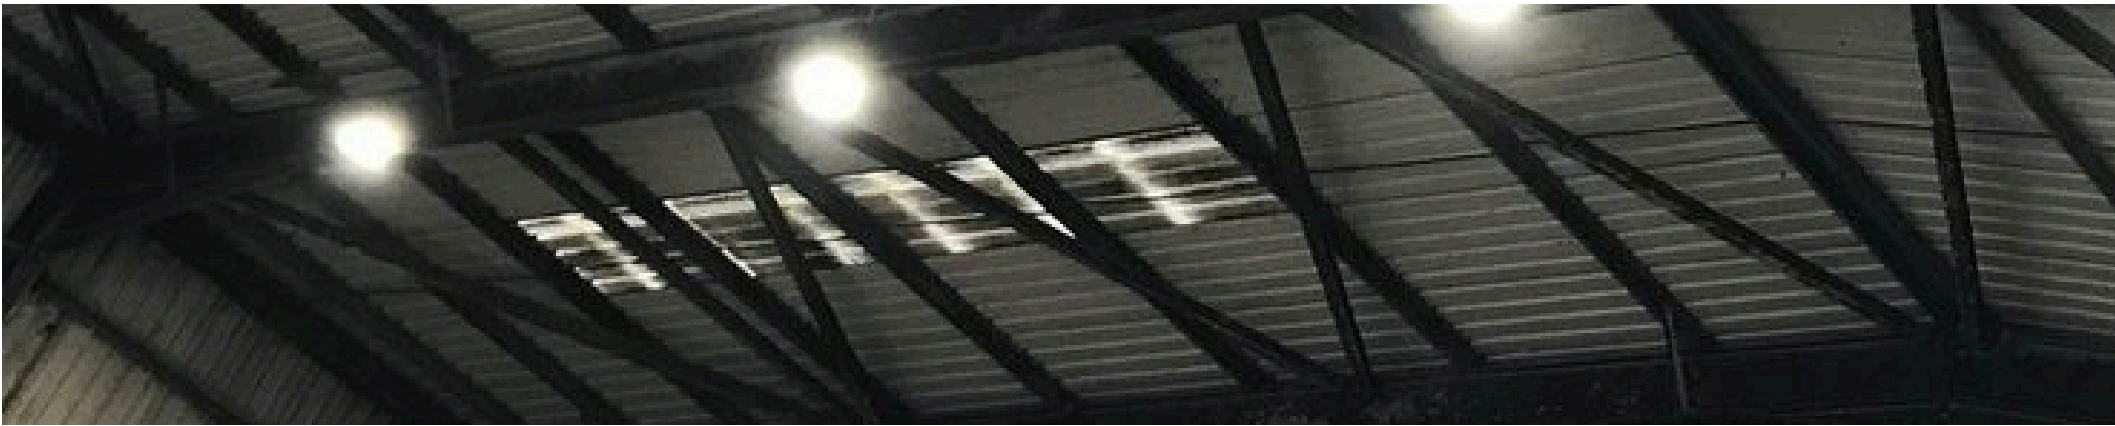



LED LINEAR HIGH BAY (PINE SSR+)
Description:
 These commercial linear high bay fixtures provide a quick and easy solution for warehouse and industrial applications. Light is soft and uniform, safe to eyes with Instant start, NO flickering, NO humming. ZSR Ready for quick sensor install. Notable features are 135 degree beam adjustment and 5 Wattage Selectable.


Features:

- Heavy-duty cast aluminum with an integrated thermally efficient heatsink profile
- Suitable for garage, gymnasium, parking garage, and workshop.
- Aircraft cable and 6ft cord included



Order Coder	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
09240 - 03	S-BXIQWY	2FT	50W	5000K	160 LM/W	8,000 LM	120-277V	White
			60W			9,600 LM		
			70W			11,200 LM		
			90W			14,400 LM		
			110W			17,600 LM		
09241 - 03	S-GNIPZJ	2FT	90W	5000K	162 LM/W	14,580 LM		
			110W			17,820 LM		
			130W			21,060 LM		
			150W			24,300 LM		
			165W			26,730 LM		
09242 - 03	S-DSX36M	2FT	150W	5000K	160 LM/W	24,000 LM	277 - 480V	White
			165W			26,400 LM		
			180W			28,800 LM		
			200W			32,000 LM		
			220W			35,200 LM		
09245	S-TICMN7	2FT	90W	5000K	162 LM/W	14,580 LM		
			110W			17,820 LM		
			130W			21,060 LM		
			150W			24,300 LM		
			165W			26,730 LM		
09246	S-VCNHUF	2FT	150W	5000K	160 LM/W	24,000 LM		
			165W			26,400 LM		
			180W			28,800 LM		
			200W			32,000 LM		
			220W			35,200 LM		

ACCESSORIES

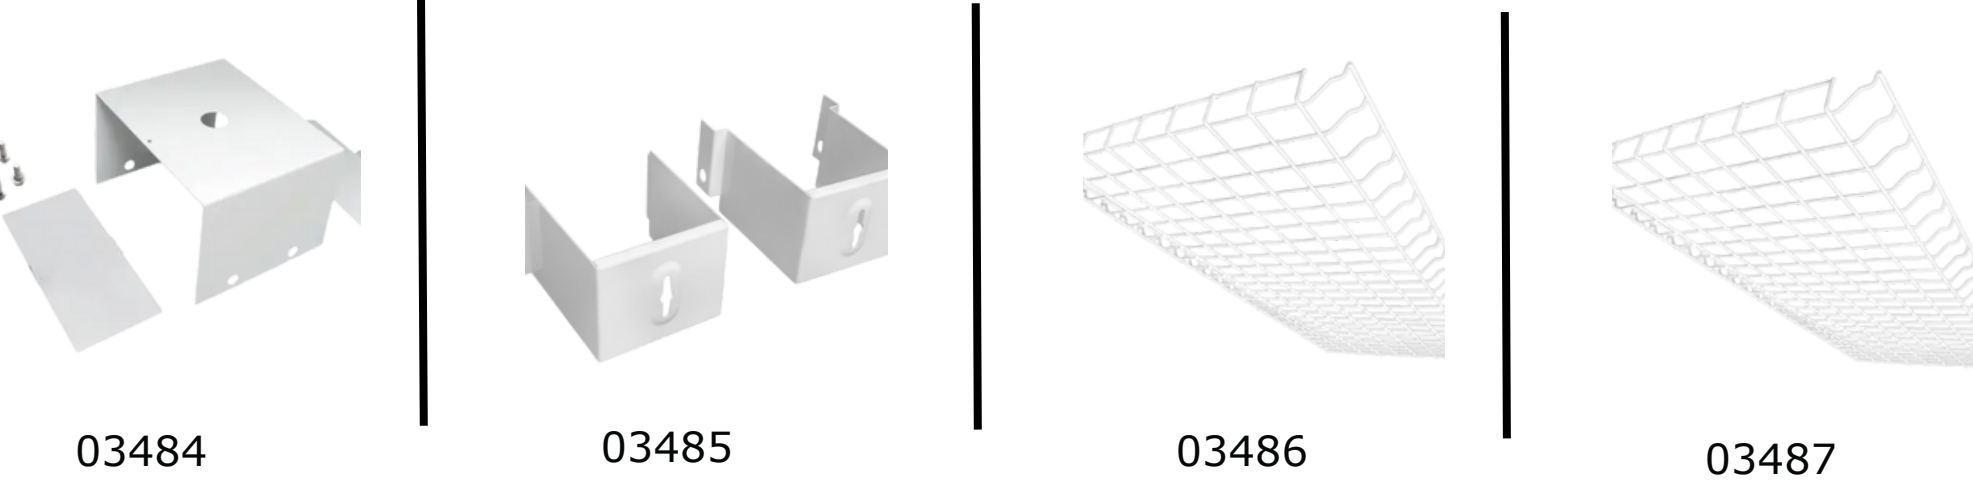

STAND ALONE CONTROLS



NETWORK LIGHTING CONTROLS






LED LINEAR HIGH BAY (PINE SERIES)

Description:


These commercial linear high bay fixtures provide a quick and easy solution for warehouse and industrial applications. The linear profile allows for a one-for-one substitution with existing linear fluorescent high bay fixtures where the original chain suspension hardware can transfer directly over for an easy quick install.

Features:

- Suitable for garage, gymnasium, parking garage, workshop
- Aircraft cable and 6ft cord included
- 10KV Surge Protection.

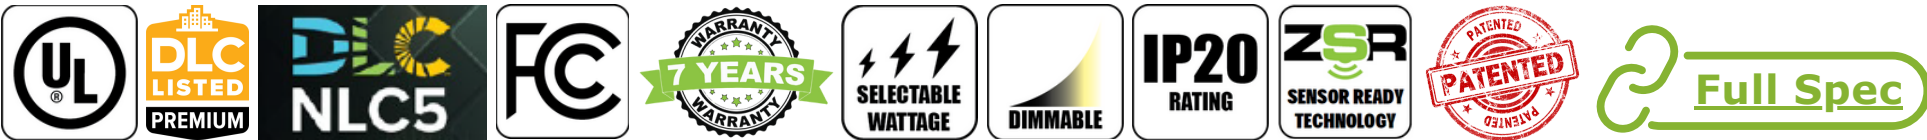

Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
09242	PU3MC9U9 PSDZ4D7C PO4NC2D6	2FT	180W 200W 220W	5000K	145 LM/W	25,560 LM 28,000 LM 29,920 LM	120-277V	White
09243	PHESIEG5 PT7ZY8W3 PCD7VJSI	3FT	180W 200W 220W			25,560 LM 28,000 LM 29,920 LM		
09244	PM8IQGRL PEG7O5QF PALLZTQ9	3FT	255W 275W 300W			35,955 LM 37,400 LM 40,500 LM		

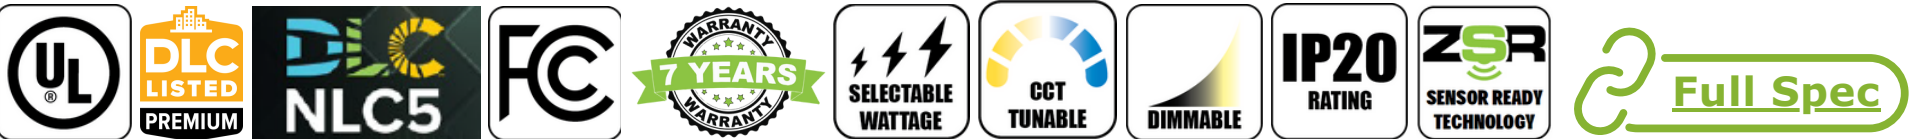

Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color
09247 - 01	PALLZTQ9	3FT	110W 165W 220W 300W	3000K 4000K 5000K	145 LM/W	15,950 LM 23,925 LM 31,900 LM 43,500 LM	120 - 277V	White

STAND ALONE CONTROLS



06251



06278

NETWORK LIGHTING CONTROLS



06264 01



06270 02



06290 01



LED SPIDER GROW LIGHTS

Description:

Our full-cycle LED Spider Grow Lights are designed to target only the parts of the spectrum your plants need to thrive through both vegetative and flowering cycles. Suitable for use with dimmers and controllers. Multiple fixtures can be connected using a single controller and then grouped together to be controlled simultaneously.

Features:

- Aluminum polycarbonate lens
- Suitable for coolers, refrigeration, workshops, warehouses
- Continuous dimming (0-10V)



MADE ON ORDER

Order Code	DLC Product ID	Watts	CCT	PPF	Beam Angle	Driver	Voltage	Color
02990	LED Spider Grow Light	330W	5000K	790	120°	Meanwell HLG320W	120-277V	Silver
02991	LED Spider Grow Light	330W		790		Sosen 320W		
02992	LED Spider Grow Light	660W		1557		Meanwell HLG320W		
02993	LED Spider Grow Light	660W		1557		Sosen 320W		



TYPES OF WALL PACKS



**LED SECURITY WALL PACK
(CHEETAH G)**

**LED STANDARD WALL PACK
(TIGER GSR)**



**LED SLIM WALL PACK
(RAPTOR GSR)**



**LED FULL CUTOFF WALL PACK
(JAGUAR GSR)**



**LED SLIM FULL CUTOFF WALL
PACK (VIPER GSR)**






LED SECURITY WALL PACK (CHEETAH G)

Description:
The Security Wall Pack is a great addition to poorly lit areas. This fixture can be mounted directly to a wall, side of the building, or above a walkway. Construction consists of a weatherproof powder-coated aluminum housing with wiring and conduit knockouts and a polycarbonate lens. Suitable for security lighting, perimeter lighting, parking garage.

Features:

- Die-cast aluminum with prismatic polycarbonate lens
- Photocell included
- Easily mount on a recessed junction box.

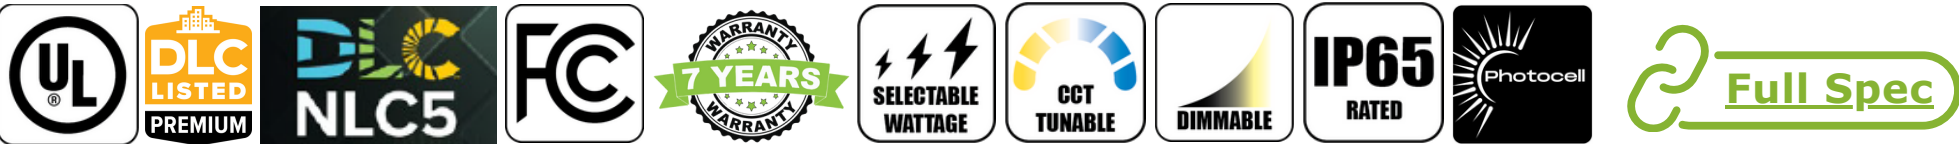

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05059	S-0L6ZV8	10W 15W 20W	3500K 4000K	135 LM/W	1,350 LM 2,025 LM 2,660 LM	120 - 277V	Bronze
05058	S-0L6ZV8	10W 15W 20W	5000K		1,350 LM 2,025 LM 2,660 LM		White




LED STANDARD WALL PACK (TIGER GSR)

Description:
The LED standard wall pack combines traditional wall pack design with high-output LEDs to provide an energy-efficient, low-maintenance LED wall pack suitable for replacing Metal Halide fixtures. The shape helps maintain building aesthetics when replacing only a portion of your building’s wall packs at a time. Suitable for warehouse, factory, storage, pedestrian lighting.


Features:

- Die-cast aluminum housing with hinged door frame.
- QSR Ready for Standalone or NLC Controls.
- Photocell included.

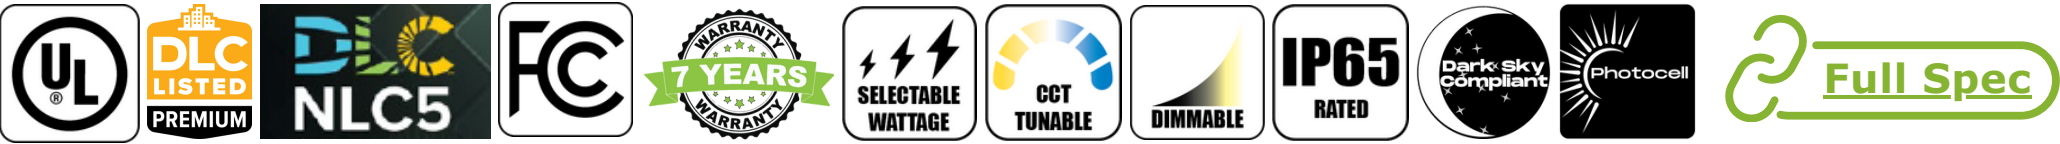

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05252-01	S-PLWIQ3	10W 20W 30W 40W	3000K 4000K 5000K	130 LM/W	1,300 LM 2,600 LM 3,900 LM 5,200 LM	120V - 277V	Bronze
05255-01	S-LKJEUW	20W 40W 60W 80W		135LM\W	2,700 LM 5,400 LM 8,100 LM 10,800 LM		
05256-01	S-SWFBX3	30W 60W 90W 120W			4,050 LM 8,100 LM 12,150 LM 16,200 LM		
05260-01	S-LKJEUW	20W 40W 60W 80W			2,700 LM 5,400 LM 8,100 LM 10,800 LM	120V - 277V	White
05259-01	S-SWFBX3	30W 60W 90W 120W			4,050 LM 8,100 LM 12,150 LM 16,200 LM		

NETWORK LIGHTING CONTROLS

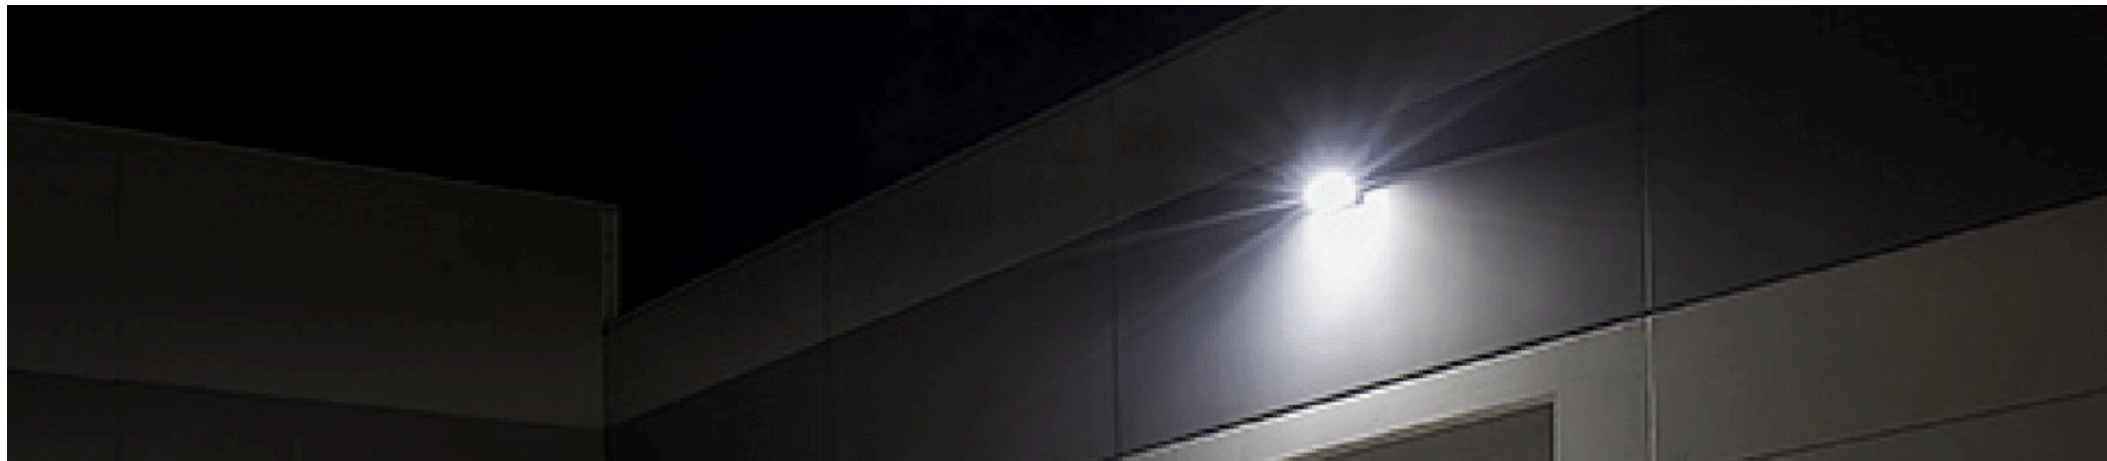



LED SLIM WALL PACK (RAPTOR GSR)

Description:
The LED Slim Wall Pack is a fusion of contemporary design and high-performance LEDs. This energy-efficient luminaire redefines outdoor lighting by seamlessly blending a sleek profile with powerful LED technology. This low-maintenance solution eliminates unwanted markings during fixture replacement. Suitable for Factories, Pedestrian lighting, Walkways, etc.

Features:

- It preserves the traditional wall pack shape to maintain the aesthetic integrity of your building.
- QSR Ready for Standalone or NLC Controls




LED FULL CUTOFF WALL PACK (JAGUAR GSR)

Description:
The LED Full Cutoff Wall Pack (Jaguar G) is a sleek and energy-efficient lighting solution that provides superior illumination with minimal light pollution. Its innovative design ensures that all light is directed downward, making it an ideal choice for outdoor applications. Easily mount the wall pack on a recessed junction box.

Features:

- Sealed with silicone to keep out dust and water.
- Built-in photocell.
- QSR Ready for Standalone or NLC Controls.

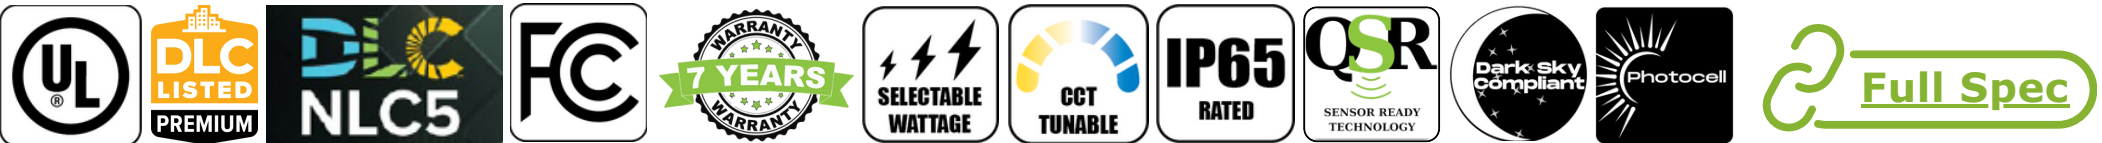

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05265	S-76ZVOK	10W 20W 30W 40W	3000K 4000K 5000K	135LM\W	1,350 LM 2,700 LM 4,050 LM 5,400 LM	120V - 277V	Bronze
05261	S-INHY9M	20W 40W 60W 80W			2,700 LM 5,400 LM 8,100 LM 10,800 LM		
05263	S-NT8Q00	30W 60W 90W 120W			4,050 LM 8,100 LM 12,150 LM 16,200 LM		
05262	S-INHY9M	20W 40W 60W 80W			2,700 LM 5,400 LM 8,100 LM 10,800 LM		
05264	S-NT8Q00	30W 60W 90W 120W			4,050 LM 8,100 LM 12,150 LM 16,200 LM		White



Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05126-02	S-MITGPO	20W 40W 60W 80W	3000K 4000K 5000K	135LM\W	2,700 LM 5,400 LM 8,100 LM 10,800 LM	120V - 277V	Bronze
05129-02	S-6L81FM	30W 60W 90W 120W			4,050 LM 8,100 LM 12,150 LM 16,200 LM		
05128-02	S-MITGPO	20W 40W 60W 80W			2,700 LM 5,400 LM 8,100 LM 10,800 LM		
05130-02	S-6L81FM	30W 60W 90W 120W			4,050 LM 8,100 LM 12,150 LM 16,200 LM		White

NETWORK LIGHTING CONTROLS



NETWORK LIGHTING CONTROLS






LED SLIM FULL CUTOFF WALL PACK (VIPER GSR)
Description:

This LED Slim Full Cutoff Wall Pack comes with selectable wattage and is PIR sensor-ready, adjustable from 0-90-degree angles, and ideal for commercial outdoor buildings. It easily replaces any pre-existing wall pack fixture. Suitable for warehouse, factory, storage, pedestrian lighting.

- Features:
- Die-cast aluminum housing with prismatic lens
 - Adjustable from 0-90 degree angle
 - Ideal for commercial outdoor buildings.

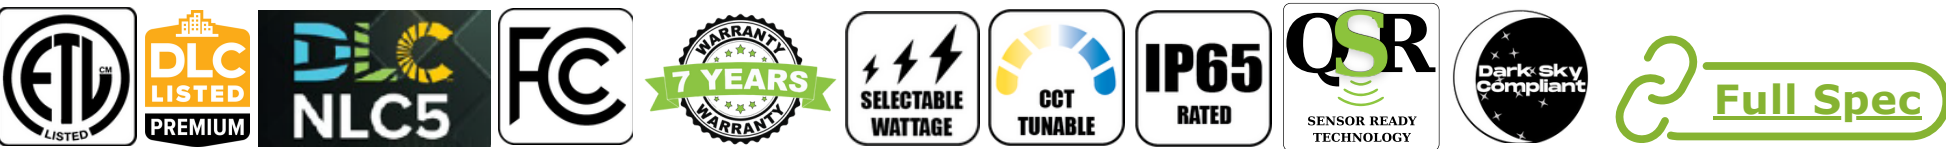


Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05108 01	S-8ZT0H4	10W	3000K	140 LM/W	1,400 LM	120-277V	Bronze
	S-WN1DM3	20W			2,800 LM		
	S-M753JS	30W			4,200 LM		
	S-FX4BF9	40W			5,600 LM		
05109 01	S-WN1DM3	20W	4000K	140 LM/W	2,800 LM		
	S-FX4BF9	40W			5,600 LM		
	S-MBJC8Z	60W			8,400 LM		
	S-RXTXGT	80W			11,200 LM		



LED CANOPY GARAGE LIGHT (LEO GSR)
Description

Capable of being mounted in any soffit/canopy or even surface mounted. Great outdoor lighting fixture applicable to 160° beam angle is perfect for illuminating large spaces without leaving dark spots any industrial or commercial premise but most particularly for gas stations.

- Features:
- 0-10V dimming.
 - Die cast aluminum with integral heatsink
 - 160° beam angle is perfect for illuminating large spaces without leaving dark spots.

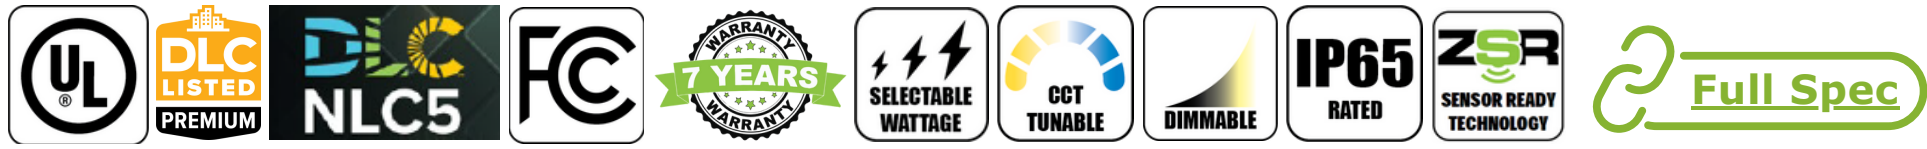


Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05825 02	S-FUBW2I	20W 30W 40W	3500K 4000K 5000K	135 LM/W	2,700 LM 4,050 LM 5,400 LM	120-277V	Bronze
05823 02	S-5EL7F8	20W 40W 60W 80W			2,700 LM 5,400 LM 8,100 LM 10,800 LM		
05826 02	S-9CIJG6	20W 30W 40W			2,700 LM 4,050 LM 5,400 LM		
05824 02	S-2Y7V9U	20W 40W 60W 80W			2,700 LM 5,400 LM 8,100 LM 10,800 LM		White

NETWORK LIGHTING CONTROLS



NETWORK LIGHTING CONTROLS



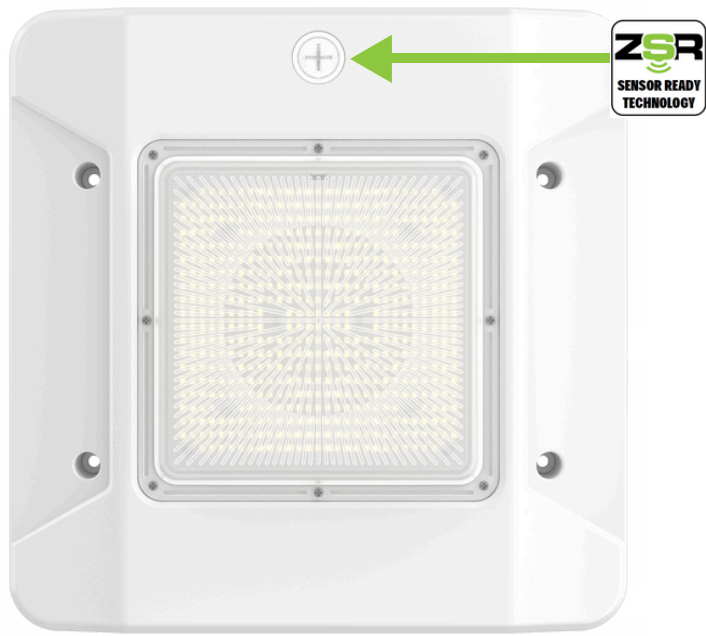

LED PETROLEUM CANOPY LIGHT (LYNX GSR)

Description

This slim and sleek LED Petroleum Canopy Light is a high- performance light fixture, capable of being mounted in any soffit/canopy or even surface mounted. Because of its unique design and features, it’s the best outdoor lighting fixture applicable to any industrial or commercial premise but most particularly for gas stations.

Features

- Die cast aluminum with integral heatsink.
- The 120-degree beam angle is perfect for illuminating large spaces without leaving dark spots.
- Capable of being mounted in any soffit/canopy.



Order Code	DLC Product ID	Watts	LM/ Watt	CCT	Total LM	Voltage	Color
05858	PL5IVWB2OO13	100W	140 LM/W	4000K	14,000 LM	120V - 277V	White
		120W		5000K	16,800 LM		
		150W		5700K	21,000 LM		

NETWORK LIGHTING CONTROLS




LED CANOPY FIXTURE (HERCULES GSR)

Description:

Provides a broad, even distribution of light that can help to enhance visibility, safety, and security in outdoor areas. They are also designed to withstand harsh weather conditions, such as rain, wind, and extreme temperatures, making them a reliable lighting solution for outdoor spaces like gas stations, cold storage, food processing.

Features:

- Low maintenance
- Easy to install for retrofits and new construction
- Knock outs on all four sides
- Can be washed down

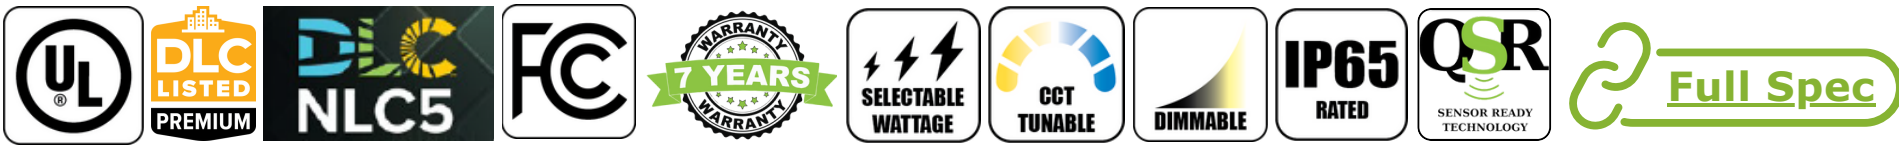

Order Code	DLC Product ID	Watt	CCT	LM/Watt	Total LM	Voltage	Color
05822	PL2F6ZV4HPJ4	100W	3000K	130 LM/W	13,000 LM	120-277V	White
		120W	4000K		15,600 LM		
		150W	5000K		19,500 LM		

NETWORK LIGHTING CONTROLS





LED DUSK-to-DAWN LIGHT (BENGAL G)

Description:

This slim and sleek LED Petroleum Canopy Light is a high- performance light fixture, capable of being mounted in any soffit/canopy or even surface mounted. The 120-degree beam angle is perfect for illuminating large spaces without leaving dark spots. It is a Great addition to poorly lit areas.

Features:

- Low maintenance
- Easy to install for retrofits and new construction
- Knockouts on all four sides
- Can be washed down



Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05005	S-Y5J3G7	40W 50W 60W	3000K 4000K 5000k	140 LM/W	8,361 LM	120-277V	Silver

STAND ALONE CONTROLS



05714

ACCESORIES



05030

LED FLOOD LIGHT (PUMA G)












Description:

This fixture provides quality and energy-efficient lighting to outdoor sports courts, parking lots, hotels, warehouses, and many more. Instant startup allows for easy installation and operation. Provides bright long lasting light with no humming or flickering. Eligible for rebates thanks to DLC certification.

Features:

- Photocell Ready
- Light is soft and uniform, safe to the eyes.
- Cast aluminum construction.
- Prismatic polycarbonate lens





Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05346	S-XYQ8PV	25W 45W 60W	3000K 4000K 5000K	155 LM/W	3,875 LM 6,975 LM 9,300 LM	120-277V	Bronze



LED BOLLARD LIGHT (GIRAFFE G)

Decsription

These stylish fixtures provide 360-degree illumination, enhancing safety and visibility in walkways and driveways. Plus, with energy-efficient LED bulbs, durable materials, and weather-resistant designs, they require minimal maintenance and can withstand the elements.

Suitable for, Walkways, Drive ways, Parks, etc.

Features

- Wattage and CCT Tunable
- Variety of Housing Colors
- Round, Square, and Dome design options
- Anti-UV pc lens, won't yellow with age



Order Code	DLC Product ID	Wattage	CCT	LM/Watt	Total LM	Voltage	Color
04800	PGPGZOIT	12W 16W 22W	3000K 4000K 5000K	130 LM/W	1,560 LM	120-277V	Clear Bronze
04801	P2LKOU DL				2,080 LM		Clear Bronze
04802 01	PQZ6T5N4				2,860 LM		Clear White

ACCESSORIES



04803



04804 01



04805





LED AREA LIGHT (LION SERIES)

Description:

Our slim design LED Area Light is built to withstand all climates and extreme temperatures. This fixture features our new ZSR sensor ready technology, allowing the ability to add an array of controls. With a Type III distribution it delivers an oval light with a lateral width of 40 degrees that is projects outwards into the area being lit, perfect for large areas

Features:

- Die cast aluminum with powder coat finish. UV-stabilized polycarbonate lens
- 6KV surge protection



Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05376	S-Z2HJBK	60W 75W 90W	3000K 4000K 5000K	150 LM/W	9,000 LM 11,250 LM 13,500 LM	120 - 277V	Bronze
05377	S-7970YD	120W 135W 150W			18,000 LM 20,250 LM 22,500 LM		
05378	S-B340XQ	200W 220W 240W			30,000LM 33,000 LM 36,000 LM		
05379	S-TDR8LR	260W 280W 300W			39,000 LM 42,000 LM 45,000 LM		
05380	S-7970YD	120W 135W 150W			18,000 LM 20,250 LM 22,500 LM		
05382	S-TDR8LR	260W 280W 300W			39,000 LM 42,000 LM 45,000 LM	277V - 480V	White
05397	S-7970YD	120W 135W 150W			18,000 LM 20,250 LM 22,500 LM		
05393	S-6MG5X6	120W 135W 150W			18,000 LM 20,250 LM 22,500 LM		
05394	S-6NZL6V	200W 220W 240W			30,000LM 33,000 LM 36,000 LM		
05395	S-99T51X	260W 280W 300W			39,000 LM 42,000 LM 45,000 LM		
05390	S-6MG5X6	120W 135W 150W			18,000 LM 20,250 LM 22,500 LM		



Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05688 01	S-9M7LZX	200W 220W 240W	5000K	140 LM/W	28,000 LM 30,800 LM 33,600 LM	120 - 277V	White

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05689 01	S-D7T2XW	260W 280W 300W	5000K	140 LM/W	36,400 LM 39,200 LM 42,000 LM	120 - 277V	White
05798 01	S-TDR8LR	260W 280W 300W			36,400 LM 39,200 LM 42,000 LM		Black
05789 01	S-Z2HJBK	60W 75W 90W			8,400 LM 10,500 LM 12,600 LM		Silver

MOUNTS



Arm Mount
BL - 05702
WH - 05701
SL - 05792



Slipfitter Mount
BL - 05705
WH - 05704
SL - 05793



Trunnion Mount
BL - 05708
WH - 05707
SL - 05794

ABBREVIATIONS

BR - BRONZE, BL - BLACK, WH - WHITE, SL - SILVER

NETWORK LIGHTING CONTROLS






LED AREA LIGHT (WOLF GSR)

Description:

Offers bright, clear, and uniform illumination that enhances visibility and improves safety in outdoor spaces. Additionally, this LED area light is available in a range of customizable options such as selectable color temperatures and wattage levels, allowing users to tailor their lighting to their specific needs.

Features:

- No UV or IR in the beam.
- Easy to install and operate.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.

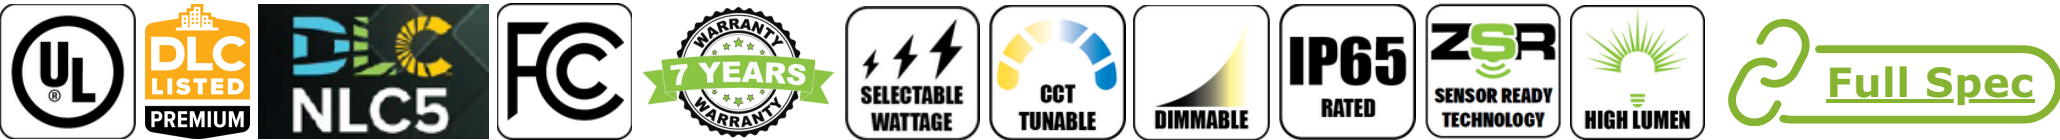

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05970	S-G5836R	60W 80W 100W	3000K 4000K 5000K	155 LM/W	9,300 LM 12,400 LM 15,500 LM	120-277V	Bronze
05971	S-WGK601	120W 135W 150W			18,600 LM 20,925 LM 23,250 LM		
05972	S-ERNBKM	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM		
05973	S-AW6CQF	260W 280W 300W			40,300 LM 43,400 LM 46,500 LM		
05974	S-JZOFTS	120W 135W 150W			18,600 LM 20,925 LM 23,250 LM	277-480V	
05975	S-FE2JLN	260W 280W 300W	40,300 LM 43,400 LM 46,500 LM				
05980	S-WGK601	120W 135W 150W	3000K 4000K 5000K	155 LM/W	18,600 LM 20,925 LM 23,250 LM	120-277V	Black
05981	S-ERNBKM	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM		
05982	S-AW6CQF	260W 280W 300W			40,300 LM 43,400 LM 46,500 LM		
05985	S-WGK601	120W 135W 150W	3000K 4000K 5000K	155 LM/W	18,600 LM 20,925 LM 23,250 LM	120-277V	Silver
05983	S-ERNBKM	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM		
05984	S-AW6CQF	260W 280W 300W			40,300 LM 43,400 LM 46,500 LM		

MOUNTS



Arm Mount

BR - 05756
BL - 05762
SL - 05765



Slipfitter Mount

BR - 05755
BL - 05761
SL - 05764



Trunnion Mount

BR - 05757
BL - 05763
SL - 05766

ABBREVIATIONS

BR - BRONZE, BL - BLACK, WH - WHITE, SL - SILVER

NETWORK LIGHTING CONTROLS



06264 04



06270 04



06290 04





LED POST TOP LIGHT (LEOPARD G)

Description:

This beautifully designed LED post-top light provides a style that can be used for traditional and contemporary applications. Some models offer CCT Tunable functionality, this light have the capability to fit all application necessities. For convenience, the photocell feature offers a maintenance-free dusk-to-dawn operation.


Features:

- No UV or IR in the beam
- Easy to install and operate.
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury



Order Code	DLC Product ID	Wattage	CCT	LM/Watt	Total LM	Voltage	Color
05898	PELB5J5P	50W	4000K 5000K	155 LM/W	7,750 LM	120-277V	Bronze
	PWV28P22	60W			9,300 LM		
	PDNX30DQ	75W			11,625 LM		
05899	S-FLC3OZ	100W			15,500 LM		
	P4PZ2B41	120W			18,600 LM		
	S-KROVZ7	150W			23,250 LM		

ACCESSORIES

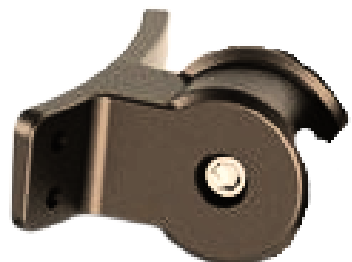

90450



05755



05756



05757




LED STREET LIGHT (COUGAR SSR)

Description:

Great addition to poorly lit areas. Fixture can be mounted directly to a wall, pole, or to a new or existing mounting arm. With its built in photocell, this fixture turns on automatically when the environment gets dark and turns off by itself with the first glimpse of daylight. Built in - the photocell feature offers a maintenance-free dusk-to-dawn operation.

Features:

- Die-Cast aluminum housing.
- Prismatic polycarbonate lens
- Suitable for barn, farm, perimeter lighting, etc.

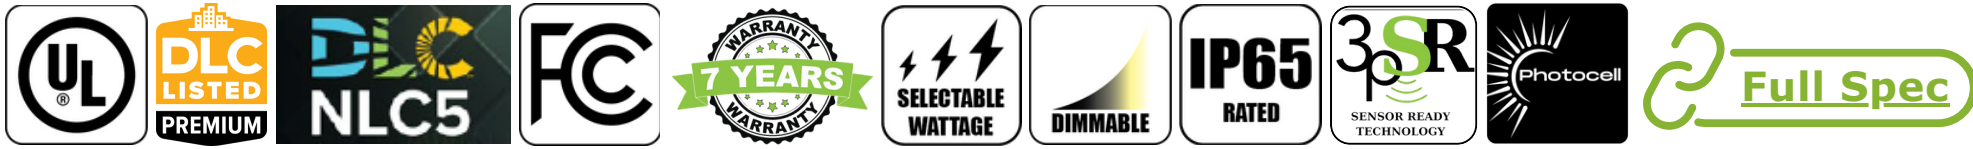

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05372	S-E7IM91	150W 200W 240W	5000K	137 LM/W	20,550 LM 27,400 LM 32,880 LM	120-277V	Silver

ACCESSORIES



05728



05792



05792

NETWORK LIGHTING CONTROLS



06264 04

+



06288



06270 04

+



06288




06290 04

+



06288



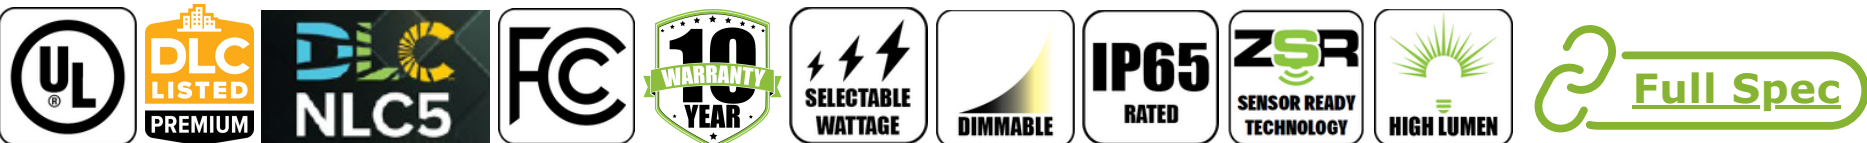

Order Code	DLC Product ID	Watt	CCT	LM/Watt	Total LM	Voltage	Color
05954	S-EO1WFH	300 W 400 W 500 W	5000K	155 LM/W	46,500LM 62,000 LM 77,500 LM	120-480V	Black
05955	S-6FPQGT	500 W 600 W 750 W			77,500 LM 93,000 LM 116,250 LM		
05956	S-WKONP7	800 W 1000 W 1200 W			124,000 LM 155,000 LM 186,000 LM		

Drivers* Driver sold separately, make sure to add appropriate driver.

Order Code	Description	Watt	Voltage	Color
05957	LED Stadium Light (Coyote SSR) Driver	300 W 400 W 600 W	120-277 V	Black
05959	LED Stadium Light (Coyote SSR) Driver	500 W 600 W 750 W		
05961	LED Stadium Light (Coyote SSR) Driver	800 W 1000 W 1200 W		
05958	LED Stadium Light (Coyote SSR) Driver	300 W 400 W 600 W	277-480 V	
05960	LED Stadium Light (Coyote SSR) Driver	500 W 600 W 750 W		
05962	LED Stadium Light (Coyote SSR) Driver	800 W 1000 W 1200 W		

Mounts



LED Stadium Light (Coyote SSR) Slipfitter Mount




Lenses

Order Code	Description	Watt
05969	LED Stadium Light (Coyote SSR) 20 degree lens	600 W 750 W
05978	LED Stadium Light (Coyote SSR) 20 degree lens	1000 W 1200 W
05979	LED Stadium Light (Coyote SSR) 40 degree lens	1000 W 1200 W
05966	LED Stadium Light (Coyote SSR) 60 degree lens	400 W 500 W
05976	LED Stadium Light (Coyote SSR) 60 degree lens	600 W 750 W
05967	LED Stadium Light (Coyote SSR) 80 degree lens	400 W 500 W
05977	LED Stadium Light (Coyote SSR) 80 degree lens	600 W 750 W
05968	LED Stadium Light (Coyote SSR) 120 degree lens	400 W 500 W

NETWORK LIGHTING CONTROLS





BR - 01004
BL - 01005

L-SHAPE WALL MOUNT BRACKET

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Wall, L Bracket
- **Weight:** 3.4 lbs
- **Available Colors:** Bronze, Black



BR - 01002
WH - 01003

STRAIGHT WALL MOUNT BRACKET

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole
- **Weight:** 2.2 lbs
- **Available Colors:** Bronze, White



BR - 01006

SIDE TENON MOUNT FOR SQUARE POLE


- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole
- **Weight:** 3.2 lbs
- **Available Colors:** Bronze



BR - 01100
WH - 01101

4" VERTICAL TENON ADAPTER

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole (Inside of pole), Round Pole (outside of pole)
- **Weight:** 7.2 lbs
- **Available Colors:** Bronze, White



BR - 01104
WH - 01105

4" SQUARE HORIZONTAL TENON ADAPTOR

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole
- **Available Colors:** Bronze, White



BR - 01106
WH - 01107

4" SQUARE SHORT 180° TWIN TENON

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole (inside of pole), Round Pole (outside of pole)
- **Weight:** 6.4 lbs
- **Available Colors:** Bronze, White



BR - 01108
WH - 01109



BR - 01110
WH - 01111

4" SQUARE SHORT 90° TWIN TENON

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole (inside of pole), Round Pole (outside of pole)
- **Weight:** 7.5 lbs
- **Available Colors:** Bronze, white



BR - 01112
WH - 01113



BR - 01114
WH - 01115

4" SQUARE SHORT 90° TRIPLE TENON

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole (inside of pole), Round Pole (outside of pole)
- **Weight:** 7.9 lbs
- **Available Colors:** Bronze, White



BR - 01116
WH - 01117



BR - 01118
WH - 01119

4" SHORT SQUARE 90° QUAD TENON

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole (inside of pole), Round Pole (outside of pole)
- **Weight:** 8.8 lbs
- **Available Colors:** Bronze, White



BR - 01120
WH - 01121



BR - 01200
WH - 01201

4" SQUARE LOW PROFILE 180° DUAL TENON

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole
- **Weight:** 24 lbs
- **Available Colors:** Bronze, White



BR - 01202

4" SQUARE LOW PROFILE 180° TRIPLE TENON

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole
- **Weight:** 56.6 lbs
- **Available Colors:** Bronze



BR - 01204

4" SQUARE LOW PROFILE 180° QUAD TENON

- **Construction:** Carbon steel with powder coat finish
- **Installation:** Square Pole
- **Weight:** 56.6 lbs
- **Available Colors:** Bronze



ABBREVIATIONS:

BR - BRONZE, BL - BLACK, WH - WHITE, SL - SILVER

ABBREVIATIONS:

BR - BRONZE, BL - BLACK, WH - WHITE, SL - SILVER

REMEMBER

OPTIONAL MES 10 YEAR WARRANTY



MES products come standard with a best-in-class 7-year warranty. For an additional peace of mind, remember to request our optional 10-year product warranty or 10-year warranty for product and labor.

See your sales representative for additional details.

LED EMERGENCY DRIVERS

Ensuring Safety and Reliability in Every
Emergency Situation






EMERGENCY DRIVERS

- Universal input range, 100-347V, 50/60Hz.
- High output voltage DC 170vdc.
- Protection: over-voltage, short-circuit, over-load, open-circuit.
- Comply with UL924 standard and CSA 22.2, No. 141 for USA and Canada.
- California Energy Commission (CEC) Title 20 with BC compliant.
- The batteries meet 500 cycles of standard charge and discharge
- Silicone potted.
- Emergency duration is 1.5 hours.



0-10V Dimmable LED Driver + Dimmer Switch

Emergency Driver Dim+(Green) , Driver Dim-(Yellow) Have to connect with LED driver DIM+ and DIM-

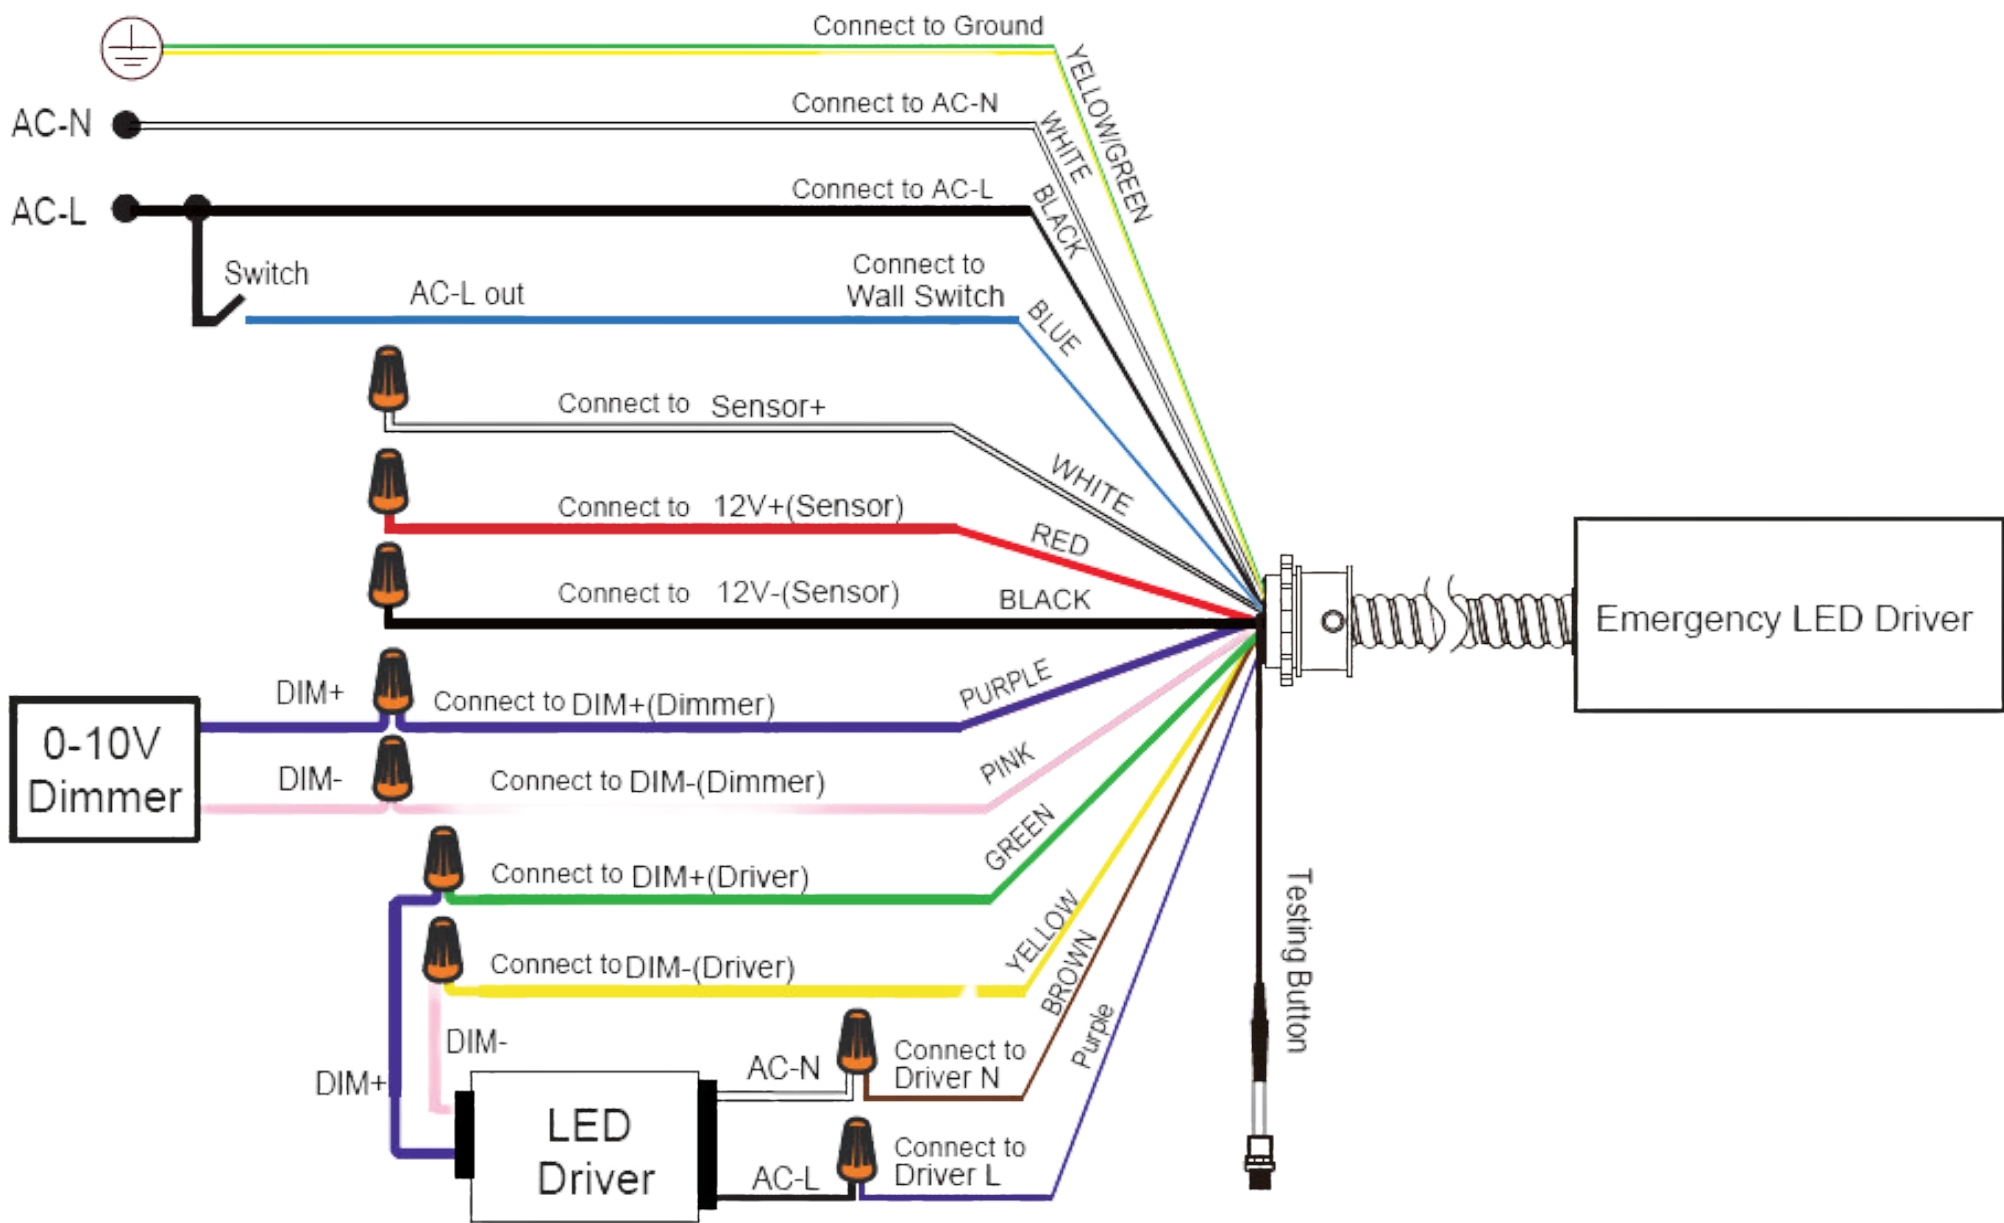

LED Emergency Driver (Helios) Round

40W - 06758




LED Emergency Driver (Helios) with LiFe P04 Battery

8W - 06451




LED Emergency Driver (Helios) Linear

8W - 06753

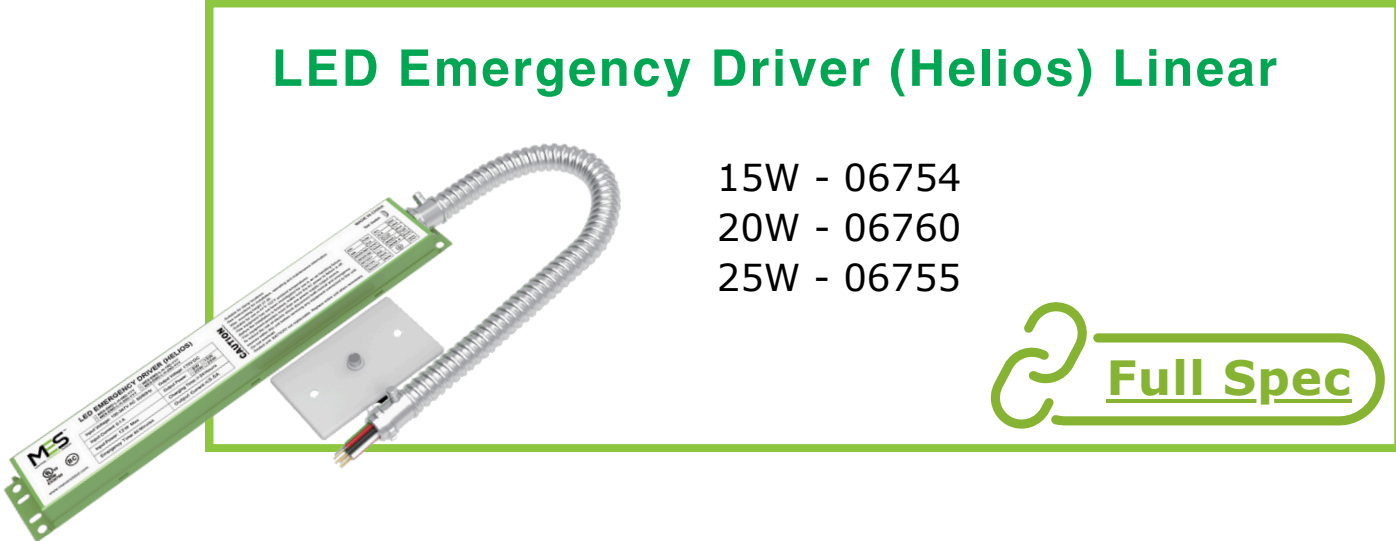

LED Emergency Driver (Helios) Linear


15W - 06754
20W - 06760
25W - 06755

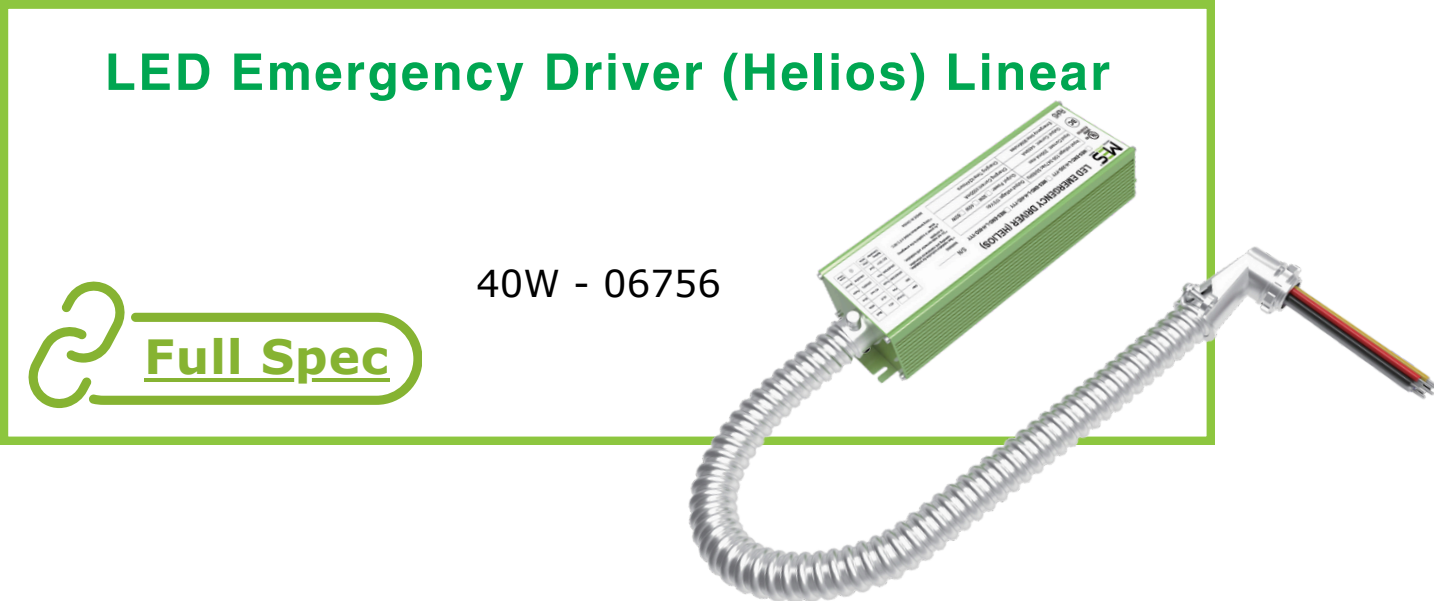

LED Emergency Driver (Helios) Linear

40W - 06756



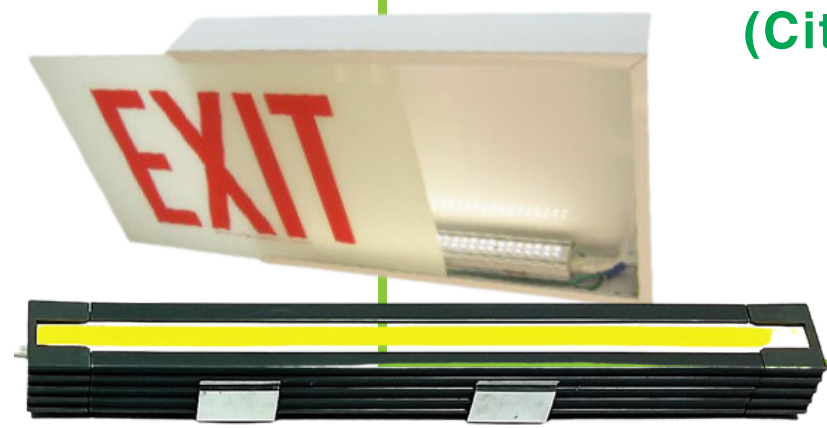

Exit Sign RetroFit Kit
(City of Chicago Approved)

06106



Exit Sign with Battery Backup 90 Min
(City of Chicago approved)

06600



Emergency Bug Eye 2 Heads

06654



Exit Sign Recessed
Edgelit

06702



Emergency Bug Eye 2 Heads
(City of Chicago approved)

06651



Exit Sign Combo

06721



Exit Sign with Battery
Backup 90 Min

19455



Exit Sign Combo
(City of Chicago Approved)

06700





Button Photocell

06451



Swivel Photocell

09172



Wall Occupancy Sensor
with Neutral

06504



Twist Lock Photocell

120-277 V

05714



Twist Lock Photocell

277-480 V

05715



PIR On/Off Occ Sensor

19FT: 06245

39FT: 06247



PIR 3-in-1 Occ
Sensor

06246




DC Powered PIR 3-in-1
Motion Sensor

06251



DC Powered OcuSense 3-in-1
Motion Sensor

06243-01

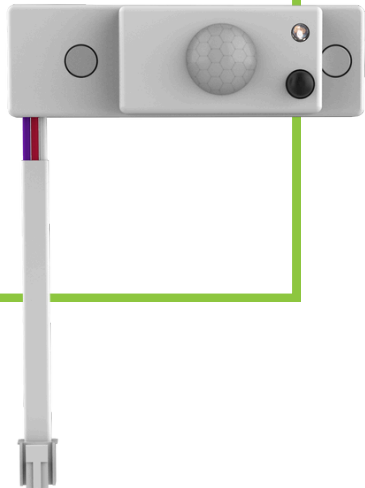

DC Powered OcuSense 3-in-1
Motion Sensor

06267




DC Powered PIR 3-in-1
Motion Sensor

06254



Network Lighting Controls

An intelligent network of individually addressable lights and control devices that allows each device to send and receive data.



Significant Energy Savings
70 - 75% Reduction in energy cost achieved through connected lighting and advanced lighting controls



Improved Building Operations
Lights can now provide performance data, for better customization beyond just lighting




Better Occupant Experience
Achieve energy efficiency without compromising the building occupant experience




No Wires Required
Decrease labor and material cost, minimum disruption to business operation during installs




Bluetooth Technology
Mesh networking allows for wireless control through app on smart phone and tablets

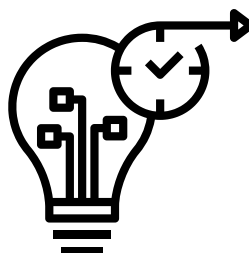


Future Extensibility
Easily add advanced controls and expand to meet changing business needs and occupant requirements.




AC Powered Fixture Mounted Occ Control w/ Daylight 40ft
06269 01
[Full Spec](#)



DC Powered PIR Occ Control w/ Daylight 17ft for All QSR Fixtures
06282
[Full Spec](#)



DC Powered PIR Occ Control w/ Daylight 40ft for All ZSR Fixtures
06270
[Full Spec](#)



DC Powered Wireless Wall Switch
06507
[Full Spec](#)




AC Powered BLE Wired Gateway Wall Adapter
06272 01
[Full Spec](#)




DC Powered OcuSense Occ Control w/ Daylight 17ft for All QSR Fixtures
06274
[Full Spec](#)



DC Powered OcuSense Occ Control w/ Daylight 50ft for All ZSR Fixtures
06271
[Full Spec](#)




AC Wired Wall Switch + Gateway
06272
[Full Spec](#)



AC Powered BLE Wired Gateway Ceiling Mount
06272 02
[Full Spec](#)



AC Powered BLE Wired Signal Extender + Gateway Box
06272 04
[Full Spec](#)

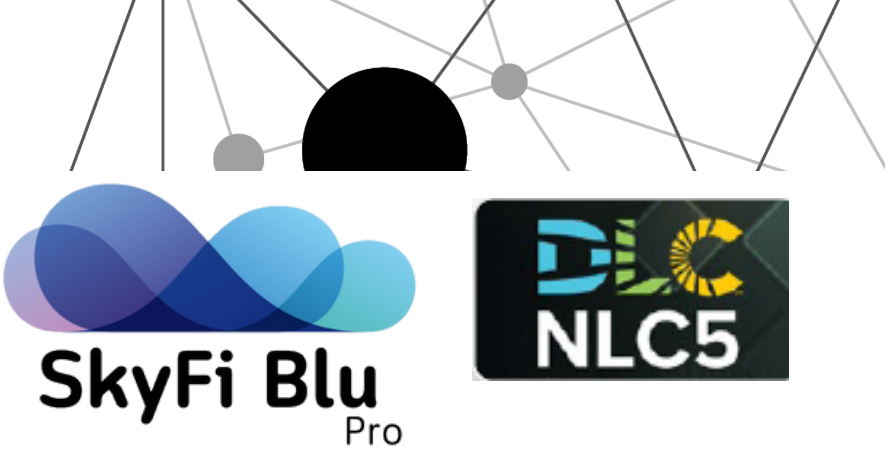

AC Powered Fixture Mounted
Occ Control w/ Daylight 40ft

06261



DC Powered PIR Ceiling Mounted
Occ Control w/ Daylight
for 06265

06266



AC Powered Fixture
Mounted Node

06265



DC Powered PIR Occ Control w/
Daylight 40ft for All ZSR & Z10
Fixtures

06264 - 01



DC Powered Bluetooth Node
for All ZSR & Z10 Fixtures
for 06264

06268



DC Powered Wireless Wall
Switch

06263



SILVAIR



DC Powered BLE OcuSense Occ
Control w/ Daylight Harvesting
White 12ft For QSR Fixtures

06291



DC Powered BLE PIR Occ Control
w/ Daylight Harvesting White 12ft
For Lilac GSR

06293



DC Powered PIR Occ Control w/
Daylight 40ft for All ZSR & Z10
Fixtures

06290 01



DC Powered BLE PIR Occ Control
w/ Dual (Photocell) Bronze for All
ZSR & Z10 Fixtures

06290 04



DC Powered BLE PIR Occ Control
w/ Daylight Harvesting White 40ft
for All 3PSR Fixtures

06292



DC Powered BLE
(Silvair) Gateway

06298





LED V-SHAPE COLD CASE (COOLER) LIGHT

Description:

This 45° LED V-shape cold case (cooler) light with a fixture bracket is ideally used for cooler lighting. The 45° V-shape design has a 160° beam angle that gives products a sharper look as more light shines towards them giving off a perfect 5000k natural white light. These LED lights come in 4', 5' and 6' variations.

Features:

- 45° V-shape angle
- 160° beam angle of natural, white light, gives products a sharper look
- LED lights contain no mercury, in
- accordance with CE and RoHS testing standards



Order Code	DLC PRODUCT ID	Size	Watts	CCT	LM/Watts	Total LM	Voltage
08072	MES-VCL418W/50	4FT	18W	6500K	118 LM/W	2,344 LM	120-277V
08073	MES-VCL532W/50	5FT	32W		125 LM/W	4,196 LM	
08074	MES-VCL640W/50	6FT	40W		123 LM/W	4,783 LM	





WALK-IN MOTOR

08100

[Full Spec](#)



REACH-IN MOTOR

08102

[Full Spec](#)



ANTI SWEAT

08010

[Full Spec](#)

Click Here For Full Spec



THERMISTER & PROGRAMMER KIT

08101 08125

[Full Spec](#)



STRIP CURTAINS

08026 08028

[Full Spec](#)



DOOR CLOSER

08000

[Full Spec](#)



COOLER MISERS

08015

[Full Spec](#)



VENDING MISERS

08017

[Full Spec](#)



SMART STRIP

19345

Full Spec

SMART THERMOSTAT

12050

Full Spec



ZERO LOSS CONDENSATE DRAIN

08240

Full Spec



AIR NOZZLE

08200


Full Spec



HAND DRYERS

19974

Full Spec

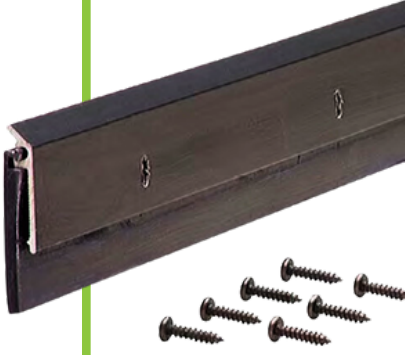

DOOR SWEEPS

Silver

2-1/4 36in - 09206
1-1/4 48in - 09204

Bronze

2-1/4 36in - 09207
1-1/4 48in - 09205

Full Spec



SHOWER HEAD

08226

Full Spec



DUAL THREAD FAUCET AERATOR

08225

Full Spec



PRE-RINSE SPRAY VALVE

08227

Full Spec



NOTES



ONBOARDING FORMS

Customer Profile Form
Credit Card Authorization Form
Credit Application Form

ORDERS

orders@maverickled.com

SHIPPING POLICY

Shipping Policy

RMA

RMA Request Form
rma@maverickled.com

CONTACT

PHONE

214.571.6374

GENERAL INFORMATION

sales@maverickled.com

WEBSITE

maverickled.com

ESS/ESCO PRICING

maverickled.com/pages/contact-us